POPULAR Computing WEEKLY

14 October 1982 Vol 1 No 26

35p

FREE COMPUTER BUY/SELL SERVICE
COMPUTER SWAP
SEE PAGE 24

We take a peek at the Colour Genie

Vic joystick program converter

Spectrum Rom secrets revealed

More machine code

Cover Story:
Asteroids
on Spectrum

Win a Jupiter Ace in our Better than Basic competition



GAMES CENTRE

THE LARGEST SELECTION OF GAMES IN THE WORLD

We stock the **BIG NAMES** in Computers including

ATARI 400/800
SINCLAIR ZX 81
ZX SPECTRUM
VIC-64
DRAGON MICRO

and a wide range of independent

SOFTWARE

Main Computer Branches: 22 OXFORD STREET, London W.1.
439 OXFORD STREET, London W.1.
52 WESTERN ROAD, BRIGHTON.

Also at: 184 REGENT STREET, London W.1.
254 REGENT STREET, London W.1.

EVERYBODY
PLEASE READ THIS

On November 1st a new Product Information Service will become available to you. You will probably see it advertised in this and other computer magazines. It will allow you to enquire about any kind of product or service within the home computer field, and receive a personal answer detailing just what is available, where from, how much, and so on, plus other useful and related information and some special offers. We will tell you more about how it operates next month. But part of the service will involve the maintenance of a Secondhand Computer Register, listing used computers and peripherals for sale privately. Appropriate information from this Register will be sent out from November 1st onwards to all interested enquirers from both this and other magazines. This Register is being compiled now, so if you have an item or items you would like to sell, perhaps before Christmas, please send us the fullest possible details right away. There are no restrictions on the number of goods offered or words used, so please make sure that you put down everything that is relevant. There is a straightforward charge of £4 for registration, reduced to £3 if the total asking price is under £100. Remember, enquiries will come from a number of sources and a very large total readership, and registration will be maintained until your goods are sold. So let us know what you have to offer. All registrations will be immediately acknowledged and details verified with you. Please make cheques or postal orders payabe to

DAVID HEARTFORD
91 High Street, Evesham
Worcestershire WR11 4DT

POPULAR Computing WEEKLY

BACK NUMBERS

MAKE SURE OF A REAL COLLECTORS' ITEM — THE FULL SET OF *PCW*

We will mail any of the numbers you're missing from Issue 1 to the latest — for just **50p** an issue, including p & p.

(We have no more copies of Issues 2, 6, 7 or 11)

Send cheques/Postal Orders to:

Back Numbers
Popular Computing Weekly
Hobhouse Court
19 Whitcomb Street
London
WC2 7HF

ABERSOFT

7 MAESAFALLEN, BOW ST, DYFED, SY24 5BA

ZX81 & Spectrum Games

Now NEW LOW prices!!!!

PROGRAM	OLD	NEW	81	SPECTRUM
Chess 1.4 10 levels m/c	10.00	8.95		
Adventure 140 locations based on the original (At £10.00 well worth the money Sinclair User Issue 2 review)	10.00	8.95		9.95*
Invaders Fast m/c arcade action	5.00	4.45		
Mazeman All the features of the original arcade version m/c	5.00	4.45		4.95

*requires 48k Spectrum

All prices are inclusive
Return of post service

POPULAR Computing WEEKLY

The Team

Editor
Brendon Gore

Reporter
David Kelly [01-930 3271]

Sub-editor
Ninette Sharp

Editorial Secretary
Theresa Lacy

Advertisement Manager
David Lake [01-839 2846]

Advertisement Executive
Alastair Macintosh [01-930 3840]

Managing Editor
Duncan Scot

Publishing Director
Jenny Ireland

Popular Computing Weekly,
Hobhouse Court, 19 Whitcomb Street,
London WC2
Telephone: **01-839 6835**

Published by Sunshine Publications Ltd.

Typesetting, origination and printing by Chesham Press, Chesham, Bucks

Distributed by S M Distribution
London SW9. 01-274 8611. Telex: 261643

© Sunshine Publications Ltd 1982

Subscriptions
You can have *Popular Computing Weekly* sent to your home: the subscription rate is **£19.95** per year, for addresses in the UK, **£37.40** overseas.

How to submit articles
Articles which are submitted for publication should not be more than 1000 words long.

All submissions should be typed and a double space should be left between each line.

Programs should, whenever possible, be computer printed.

At present we cannot guarantee to return every submitted article, so please keep a copy.

Accuracy
Popular Computing Weekly cannot accept any responsibility for any errors in programs we publish, although we will always try our best to make sure programs work.

This Week



Cover illustration by Ian Craig

News 5
Texas offers £50 refund.

Letters 7
I'm nothing but a hound dog.

Asteroids 8
A new game for Spectrum by Antony Ascroft.

Street Life 10
David Kelly talks to Nigel Searle of Sinclair.

Machine Code 11
Memory and the micro.

Reviews 12
We look inside the Colour Genie.

Open Forum 16
Five and a half pages of your programs.

Better than Basic 21
Win a Jupiter Ace.

Spectrum 22
Rom secrets revealed.

Programming 23
Vic joystick control.

Peek & poke 25
Your questions answered.

Competitions 26
Puzzle, Arthur.

Editorial

Microcomputers have many applications, both serious and not-so-serious. However, most people buy microcomputers primarily to play games on them.

There is nothing wrong with playing games. They can be stimulating, relaxing, even useful. Above all they are fun.

But, microcomputers are essentially tools. They are aids to reasoning that can be put to whatever use we decide.

As yet, however, despite a few fanciful schemes about running nuclear power stations from ZX81s, microcomputers have not really been assimilated into our society. This is because we are uncertain how microcomputers should be used in industry, commerce and the home.


Increasingly, the limits placed on microcomputers are not technical but those of the imagination. Quite simply, we have yet to explore the real potential of these machines.

What we need is for people who are familiar with microcomputers to look at everyday situations in a new light. Why not suggest to your friends and colleagues ways in which microcomputers could make their lives easier?

Next Week



Can you land your lunar module before your fuel runs out? Find out in Moon Lander — a new game for Vic20.

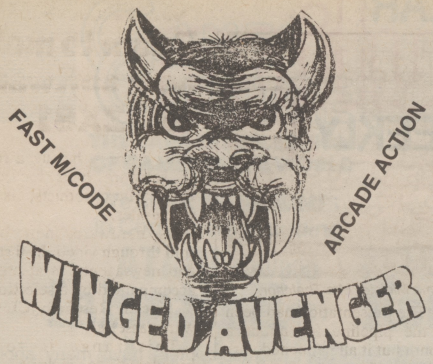

7 LEVELS, RAPID FIRING, LASER SHIELD, MOTHER SHIP, RE-FUELLING, SMART BOMBS, 3 WAVES, HIGH SCORE SPECTRUM VERSION HAS SOUND AND GRAPHICS. ONLY **£4.50.** FOR SPECTRUM OR 16K ZX81. P.C.W. "ONE OF THE BEST SINCLAIR GAMES YET". Y.C. "THE ACTION IS FAST."

SPECTRUM RENUMBER DELETE. "YOU WON'T BUY A BETTER RENUMBER PROGRAM FOR THE SPECTRUM." 600 BYTES. POSITION INDEPENDENT. SUPERB. RENUMBERS ALL NOT PART. A BARGAIN AT **£4.95.**

SOFTWARE CAT. SEND 22p stamps. Authors join our success. YOU WRITE, we SELL. SPECTRUM or DRAGON. ONLY YOUR BEST PLEASE.

WORK FORCE 140, WILSDEN AVENUE, LUTON, BEDS.

NEW FROM ★★ CAMEL PRODUCTS ★★

AN INNOVATIVE PRODUCT

FOR YOUR ZX81

Faster than a Floppy
Easier than an EPROM

MEMIC-81

HOW IT WORKS AND WHAT IT DOES

This useful accessory for ZX81 users is a 2 kilobyte (or 4 kB) memory module using chips fabricated in a remarkable technology. When not actually in use, these CMOS chips can be put into standby. They then take only a minute current to retain the data securely. The Lithium battery fitted in the unit will last for 5 to 10 years. Plug it into the ZX81 and flick a switch and the data is ready for retrieval.

MEMIC-81 resides in the 8-12 k area of the ZX81's memory map. This area is not directly addressed by Basic, but Basic programs can easily be stored and retrieved by means of the tiny 12 byte routine provided. This can itself be stored in CMOS, so that Basic programs become available simply by entering PRINT USR . . . Machine Code routines are directly accessible.

Clear User Notes, Application Notes, Program Example and the necessary routines are provided with MEMIC-81, which comes cased and with an extender card at the back.

2 kB MEMIC-81 **£24.95** + **VAT**
4 kB MEMIC-81 **£29.95** + **VAT**

OTHER CAMEL PRODUCTS

MEMIC T	2 kB Towerblock version for any System	**£29.95 incl.**
MEMIC L	2 kB Low Profile version with cabled connector	**£29.95 incl.**
PIO-81	8+8 Ch. latched Input/Output ZX81 card	**£13.00 + VAT**
ROM-81	2kB-8kB EPROM Unit/Wait States	**£14.95 + VAT**

Cambridge Microelectronics Ltd., One Milton Rd. Cambridge. CB4 1UY Tel. (0223) 314 814

YOU ARE INVITED TO SUBMIT YOUR ORIGINAL PROGRAMMES FOR COMMERCIAL CONSIDERATION

All material should be of good quality and of marketable standards (i.e. bug free!), submitted on cassette with outlining instructions.

In return for the right product there will be substantial financial rewards with a Supplier Agreement for an agreed fixed period. M/Code programmers will benefit from added incentives.

If you think that you can actively contribute to the above, forward your programme to:

DATABASE SOFTWARE
97 DEFOE DRIVE
PARK HALL
STOKE-ON-TRENT

POPULAR Computing WEEKLY CLASSIFIED ADVERTISING

Computer Swap — Free/Private reader — 10p a word/Trade Advertisement — 20p a word/Semi-display — £5 a single column centimetre, minimum two-column centimetres.
Computer Swap — buy or sell your computer for free through Computer Swap.
Private readers — other advertisements from private readers cost 10p a word.
Trade advertisements — cost 20p a word.
Semi-display — why not make your advertisement more substantial by choosing the semi-display rate. It is only £5 a single column centimetre.
Send your classified entries to Classified Department, *Popular Computing Weekly*, Hobhouse Court, 19 Whitcomb Street, London WC2. For semi-display enquiries call Alastair Macintosh on 01-930 3840.

Here's my classified ad.

Please continue on a separate sheet of paper

I make this ..... words, at ..... per word so I owe you £ .....

Name .....

Address .....

.....

Telephone .....

Spectrum gift for Japanese Premier

A ZX Spectrum microcomputer was presented to Mr Zenko Suzuki, the Japanese Premier, by Prime Minister, Mrs Thatcher, during her official visit to the country in September.

The informal presentation took place before a dinner reception held for Mr Suzuki at the British Embassy.

Mrs Thatcher ran a short program drawing the flags of the two countries to demonstrate the machine to the Japanese Premier. A Downing Street spokesman said that Mr Suzuki seemed delighted with the gift, and that "the Spectrum was chosen as an example of recent British high-technology".

The event followed a meeting earlier this year between Clive Sinclair and Mrs Thatcher. Representing Sinclair Research in Japan was John Mathieson of the company's technical staff. He said that the Spectrum was one of three specially constructed for the event and designed to work with the Japanese 60Hz, 525 lines tv network.



Prime Minister Mrs Thatcher.

"The presentation had been in the pipeline for about a month but it all happened very quickly. Clive telephoned me two days before and said they wanted somebody to demonstrate the system. I said 'Where? Downing Street'. He said 'No, Tokyo'."

Texas offers £50 refund on TI99-4A

A £50 cash rebate is being offered by Texas Instruments on purchases of its TI99-4A home computer, in an attempt to shore-up its flagging sales in time for the Christmas market.

Buyers of the TI99-4A, at its normal retail price of £199, will be given a form which can be presented to TI for the £50 cash refund.

The scheme will run from October 15 until the end of January. TI will then decide whether to convert the rebate into a firm price reduction.

TI Marketing Manager, Irfan Salem, says that the home computer market has gone very quiet for TI. It has the option of either cutting the price or of advertising heavily in the national press. Having chosen to cut the price, the rebate scheme offered the quickest way of getting the effect through to the customer.

A similar scheme was launched in the United States in August and is reported to have increased sales by a factor of eight.

Irfan Salem believes that the effect of the rebate will be to help bridge the gap between the home computer and the video game market. This will bring the TI99-4A into close competition with the ZX Spectrum and prepare the ground for the expected price reductions on all the Commodore Vic range and the launch of the new Commodore 64.



The 16K Oric I will cost £99.95 and will include eight colours and a 240×200 high-resolution display.

Oric 1 launch in mid-November

THE much-awaited Oric I microcomputer will be launched in mid-November.

Two versions of the machine, a 16K model at £99.95 and a 48K model at £169, will be produced. Both will feature an enhanced form of Microsoft Basic, 8 colours (programmed like the Spectrum as Ink and Paper), 40 × 28 teletext compatible low-resolution screen with full editing and 240 × 200 high-resolution display. Also provided are four voices (three music, one noise) with seven octaves and envelope control, and four pre-programmed sound commands — *Zap*, *Explode*, *Shoot* and *Ping*.

The Oric is fitted with an expansion connector, Centronics port and audio and video monitor outputs. A modem, printer and discs are planned. The modem will come first at £59.95, followed by the printer at about £160, both scheduled for Spring 1983.

Oric Products, who will produce the machine, has been formed to combine the design expertise of Tangerine Computer Systems and the financial backing of British Car Auctions.

Tangerine's Paul Kaufman said: "The Oric is a competitor for the Spectrum. We are convinced that it is a better machine and we have a lot of big distributors keen to take it on."

Initially it will sell by mail-order and be distributed by Tangerine Computer Systems, Science Park, Cambridge.

Prism to make new software for ZX81

THE ZX81 is having a range of software built for it by Prism Microproducts, its UK wholesaler.

Its hardware, now being sold through video, hi-fi stores and newsagents, is at present accompanied by a selection of 32 Sinclair Research/ICL software cassettes.

This range is to be broadened to include tapes from many leading software producers.

Prism's Managing Director, Bob Denton, said: "The market has changed — it is no longer mail-order, it is retail. We have a huge potential number of retail outlets that have never been available to many of the software companies. We have written to everybody who, as far as we know, has produced material for the ZX81, and many have submitted samples to us. Any software passing our quality assessment will be included to augment the Sinclair catalogue," he said.

Mark Eyles of the software company Quicksilva echoed his comments. "Software is no longer a specialist market," he said. "The ZX81 is now a true High Street microcomputer and we get very few cassette mail-orders now. Quicksilva is in contact with Prism. If the ZX81 is to be sold in newsagents then that is where we want our tapes."

ZX81 puts on its snow shoes for Austria

SINCLAIR launched the ZX81 in Austria on September 30. Distribution will be handled by Sinclair's Austrian agent Electronova.

Dr Lagler, head of Electronova, hopes to sell 5,000-10,000 ZX81s by Christmas.

This move follows the success of ZX81 sales elsewhere in Europe. France has sold more than 50,000 ZX81s since October 1981, and West Germany almost as many.


Other countries which now sell the ZX81 include Spain, Italy, Denmark, Belgium, Holland, Switzerland, Norway and Sweden.

THE WORKING SPECTRUM

A LIBRARY OF PRACTICAL SUBROUTINES AND PROGRAMS

By David Lawrence

ONLY £5.95 inc p&p

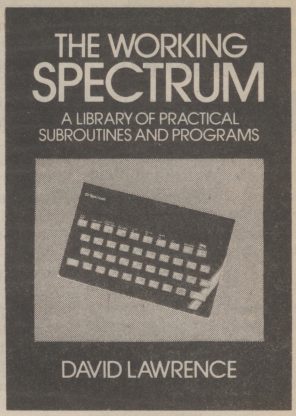

This book shows you how to make practical use of the ideas and programming methods you read about in the Spectrum manual.

Using a new technique, David Lawrence develops and explains over 100 Spectrum subroutines. Each program and routine is broken down into short, understandable modules which are explained line by line.

As you build up your program and subroutine library you will find yourself learning many advanced programming skills.


The collection of subroutines and programs includes a series of active games, graphics and design routines, data-handling routines, educational programs and utility programs such as Basic renumbering. The emphasis of all of them is to enable you to put your Spectrum to practical use and make it work.

All the programs are good enough to be sold on cassette.

The Working Spectrum is published by Sunshine Books, in association with Popular Computing Weekly.

Please send me a copy of The Working Spectrum.
I enclose a cheque/postal order for £5.95.
Name.....
Address.....
.....
.....
Signed.....
Please make your cheques payable to Sunshine Books.
Please send your order to The Working Spectrum, Sunshine Books, Hobhouse Court, 19 Whitcomb Street, London WC2 7HF.
Please allow 28 days for delivery.

AT LAST-YOUR CHANCE TO CRACK THE MACHINE CODE

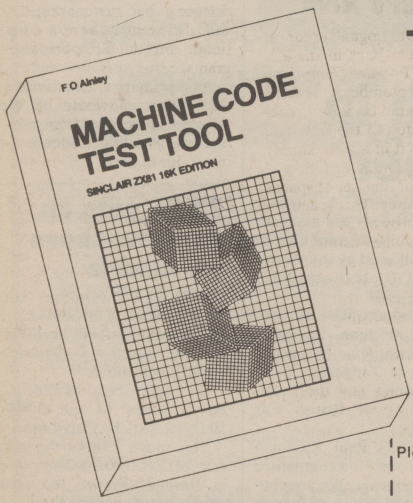

- ✳ If you are interested in finding out how a computer **really** works and want to experience true programming power – the machine Code Test Tool is the answer.
- ✳ The Machine Code Test Tool is a utility programme which comes complete with tutorial course enabling you to enter, test, display and debug hexadecimal machine codes simply and quickly.
- ✳ The Machine Code Test Tool is constructed to help the absolute beginner who wishes to explore this fascinating subject, or the expert keen to utilize up his machine code programs.
- ✳ A HEX: decimal conversion routine is contained within the programmed as standard.

Also available from most branches of

WHSMITH

Post to: OXFORD COMPUTER PUBLISHING, P.O. Box 99. Oxford

Please send me ..... Machine Code Test Tools at £9.95 each

Tick box for edition required ☐ ZX81 ☐ SPECTRUM
Send cheque/postal order to above address

NAME .....

ADDRESS .....

POSTCODE..... ABC123

Allow 28 days for postage

Letters

write to Letters, Popular Computing Weekly, Hobhouse Court, 19 Whitcomb Street, London WC2

A rose by any other name

Elvis Cinclair is pleased to announce his new home computer, the 'Cinclair Rainbow'. It will sell for £124.99 for the 17K or £174.99 for the 49K version and is designed to replace my ZX18.

For the technically minded, it has 257 × 193 hi-res graphics with 39 different colours (30 of which are the same) and can play Beethoven's 9th (with additional music Rom). In about a year or two we will introduce the new 'Cinclair Maxidrive', a very small disc drive designed to look like a big one, and an RS233/network interface board to connect your micro up to three power stations at once.

To purchase a Rainbow, please send your cheque made out to 'Cinclair Research Ltd' with an SAE to return the money after four months.

Elvis Cinclair
Cinclair Research Ltd
[Directors: Elvis Cinclair and his Mum]
83 Cornwall Road
Bishopston
Bristol

Constructive criticism

I would like to air a couple of criticisms that I hope you will find constructive. Both refer to *Popular Computing Weekly*, September 9.

Re the Editorial: ". . . I just wish the Jupiter Ace was colour instead of black and white . . .". I hope that the micro business has not reached such a level that, as soon as a new micro is brought out, every other manufacturer has to follow suit, with features almost identical to its competitor. I rarely use the colour on my Commodore Vic, but just revert to white text on an all-black background.

The way that the sentence was written seems to say that the writer of the editorial is now thoroughly fed-up with any computer except those that offer the facilities of colour display.

Re 'Jupiter Ace makes Forth bid for stardom'. I got fed-up with the way the author seemed to use Basic as the language against which all others are judged. ". . . — a fear of the unknown? — . . ."????!!! People have the option of writing programs in whichever language they choose, and it is unfair to say that one language has superiority over another. They each have their own advantages and disadvantages, so why can't the two exist quite happily side-by-side instead of aiming towards an either/or situation.

I am 15 years old and have been programming microcomputers for two years. During that time I have learnt to program in Basic, Algol, Pilot, Forth and two machine codes. I have even written my own Pilot interpreter for the Commodore Pet. There is nothing really difficult about learning another computer language, as long as it is tackled properly. So why be afraid of it? '2 5 +' is not at all unnatural once you have read a little on how Forth computes it's arithmetic.

Apart from those two points, I consider your mag to be one of the best on the market today (grovel . . . grovel).

PS BRING BACK CITIZEN PAIN!

D Bellchamber
23 Croftlands Avenue
Stubbington
Fareham
Hampshire PO14 2JR

Far from being thoroughly fed-up with black and white micros, I am an avid fan of machines such as the ZX81 and the Acorn Atom.

However, there is no doubt that the vast majority of microcomputer users prefer colour to black and white. Hence the massive interest shown in the Spectrum, Dragon 32 et al.

While I was most impressed with the Jupiter Ace, and wish both it and its inventors well, I think it would be a far more commercial proposition if it was a colour machine.

As for Boris Allan's review of the Jupiter Ace, he was comparing Forth with Basic simply because Basic is the language most commonly used by micro enthusiasts. As you rightly point out, there are advantages and disadvantages to both languages.

Finally, Citizen Pain. Our readers seemed to either love him or hate him. Unfortunately, most of them seemed to hate him.

And now a Dragon!

Dragons *are* being tamed north of the Border!

Upon capturing my beast and feeding him a diet of the Dragon manual (162 pages), the quick reference guide and an errata sheet, he is still longing for more. It is a thankless task, and, unless I can feed him plentiful data about the high-resolution graphics capabilities, he threatens to toast me to a frazzle.

So please, *please*, could you print a listing using *PmODE, Point, Get, Put, Pcopy, Pclear* etc and try to clarify my predicament.

I'm sure that other Dragon tamers are having this problem with their beasts.

I must run now, its all go with a Dragon to look after.

Paul Richardson
17 Gordon Terrace
Aberdeenshire
Scotland

Our first Dragon program was published in our September 30 issue. Further programs and articles will follow. After all, we have no desire to be toasted to a frazzle either.

Logan's Rom

After Dr Logan's request for Rom bugs in the ZX Spectrum (*Popular Computing Weekly*, September 9), I felt I had to respond because I reckon I have found the best one yet. To see it in action, simply type in a line number followed by a space or number of spaces and press enter. The Spectrum will respond by placing the line number in the listing. The program will still run OK, and the lines act like Rems.

As an example, try: 10 space Enter, and the listing will just say 10.

I am sure this is worth a free copy of Ian Logan's new book (hint, hint), ask him what he thinks.

W J Day
17 James Watt Avenue
Corby
Northants NN17 1BX

Disappearing tricks

Ian Logan's letter on Spectrum bugs in your September 9 issue was most interesting. Your readers may care to investigate a couple of the points he makes with the following simple program:

```
10 FOR A = −65530 TO −65540
   STEP −1: PRINT A, INT A:
   NEXT A
```

Use this to find the magic disappearance of the number −65536 and the inability of the loop ever to come to a halt.

At the same time, as you continually meet the "scroll?" prompt, try Ian's suggestions for strange responses to this. What Ian doesn't actually say is that after one has used some combinations of these responses, the response "n" to the prompt does not operate.

Eric Deeson
4 Ethel Road
Harborne
Birmingham
B17 0EL

Reader's request

Within the next few months a large number of primary schools will be ordering (and hopefully receiving) a microcomputer under the Department of Industry Scheme. Some teachers may be content to rely solely on professionally produced software, but most, I suspect, will also want to have a go at producing their own programs.

As a primary teacher with a BBC micro. I would be interested in hearing from anyone who would consider joining a BBC users' group that would suggest, develop and exchange (by post): a) short programs designed for children aged 5-11; together with b) notes on how the programs, and others that become available for the BBC micro, might be best used and adapted.

Please send a SAE — along with any ideas you might have for such a Users' Group — to me.

J Sheard
31 Glen Court
Avenue Road
Wolverhampton
West Midlands WV3 9JW

If you have an opinion you want to express, or have spotted an error that needs correcting, write to: Letters, Popular Computing Weekly, Hobhouse Court, 19 Whitcomb Street, London WC2.

COVER STORY

Asteroids

A new game for 16K Spectrum

by Antony Ascroft

This is a game in which you have to dodge rocks which come towards you. The game starts with a pause (in which the computer sets up the characters needed in the game). It then asks for your name and the required level of difficulty.

Asteroids start at the bottom of the screen and work their way to the top. Your aim is to dodge the rocks and collect as many points as possible. You move the ship by the keys 5 (left) and 8 (right). To fire press 0.

When you fire, a missile goes down the screen five rows. If it hits an asteroid it blows up. Shooting a spaceship gives you an extra 25 points. But, watch out for debris.

If you get past a batch of 100 asteroids, then you get another missile — you only have 10 to start with. But you also move down the screen one row, which makes the game harder as it progresses.

When you finally collide with an asteroid, you are given your score and the highest score on that level.

There are several sub-routines, which are listed below:

5-40	Sets variables and colour.
100-170	Main part of program.
210-265	When the game is over.
400-470	Missile launch.
500-560	Start of game.
1000-1040	Creates the characters.
1050-1090	Data for characters.
2000	Data for different levels.

Remember when you first put the program in that the characters have not yet been formed. So, put the computer into graphic mode and then press the relevant key:

In line 110 the symbol is graphic A
In line 130 the symbol is graphic B
In line 135 the symbol is graphic C
In line 420 the symbol is graphic D
In line 460 the symbol is graphic E





```
  1 REM a
  3 REM © Antony Ascroft
  4 REM ASTROIDS SPECTRUM 16K
  5 BORDER 2: PAPER 1: CLS : IN
K 7
  7 POKE 23609,255: POKE 23608,
255
  8 LET v=0
 10 LET f=10
 15 DIM v(6): DIM h$(6,12)
 20 GO SUB 1000
 25 LET a=10
 30 GO TO 500
 33 LET C=0
 35 LET f=10
 40 LET e=0
 80 REM main progam
 90 FOR n=1 TO 100
100 LET b=INT (RND*16)
105 LET c=c+1
107 POKE 23692,255
110 PRINT AT e,a; INK 6;"♠"
115 LET a=a+(INKEY$="8")+(a<-1)
-(INKEY$="5") AND (a>-1)
116 IF a=0 THEN LET a=1
117 IF INKEY$="0" THEN GO TO 40
0
118 IF a=32 THEN LET a=31
120 PRINT AT 21,0;"+"
130 PRINT TAB b;"♠
 ♠"
135 IF INT (RND*30)=5 THEN PRIN
T TAB b+1+INT (RND*15); INK 6;"♠
": BEEP .1,60
137 LET a$=SCREEN$ (e+1,a)
140 IF a$<>" " THEN GO TO 200
147 BEEP .1,0
150 NEXT n
155 BEEP .25,1
160 LET c=c+10
165 LET e=e+(e<17)
167 LET f=f+1
170 GO TO 90
200 CLS
210 PRINT AT 5,2;b$;" You score
d ";c
213 PRINT AT 6,2;"You had ";f;"
MISSILES left"
215 BEEP 1,5: BEEP 1,9: BEEP 1,
5
230 PRINT AT 8,10; FLASH 1;"PRE
SS ENTER FOR": PRINT AT 9,12; FL
ASH 1;"ANOTHER"
240 IF c>v(z) THEN GO TO 550
250 PRINT AT 11,0;"Highest scor
e at level ";z;" was by  ";h$(z,
1 TO )''"Who got ";v(z)
260 INPUT a$
265 CLS
270 GO TO 500
400 IF f=0 THEN GO TO 150
403 LET f=f-1
405 FOR m=e+1 TO e+6
407 IF ATTR (m,a)=143 THEN GO T
O 422
410 IF SCREEN$ (m,a)<>" " THEN
GO TO 450
420 PRINT AT m,a;"↓"
422 BEEP .05,50
425 IF ATTR (m,a)<>143 THEN PRI
NT AT m,a;" "
430 NEXT m
440 GO TO 150
450 IF ATTR (m,a)=14 THEN LET c
=c+25: BEEP .2,30: BEEP .2,0
460 PRINT AT m,a; FLASH 1;"*"
465 BEEP .15,-30
470 GO TO 150
500 INPUT "What is your name ";
b$
505 INPUT "Level 1-6(6 hard) ";
z
507 IF z>6 THEN GO TO 505
510 FOR k=1 TO z: READ j: NEXT
k:
515 RESTORE 2000
520 GO TO 33
550 LET v(z)=c: LET h$(z)=b$
560 GO TO 240
1000 FOR m=1 TO 5
1005 READ a$
1010 FOR n=0 TO 7
1020 READ a: POKE USR a$+n,a
1030 NEXT n
1035 NEXT m
1040 RETURN
1050 DATA "a",0,0,0,24,60,126,24
0
1060 DATA "b",0,24,44,110,126,60
,24,0
1070 DATA "c",0,0,0,8,54,46,65,0
1080 DATA "d",0,16,16,16,84,56,1
6,0
1090 DATA "e",0,73,42,28,127,28,
42,73
2000 DATA .20,.17,.13,.07,.03,0
```

The two faces of Nigel Searle

***David Kelly** talks to the head of Sinclair's computer division.*

Nigel Searle studied mathematics and computer science at Lancaster University and then did a PhD in artificial intelligence at Edinburgh. For the past 10 years he has been involved in one way or another with the Sinclair companies.

Originally, he worked on the design of the Sinclair scientific and programmable calculators. Then he ran the company's American office in Boston for two years. In March this year he returned to the UK as head of the computer division of Sinclair Research, responsible for all activities in the company relating to computers.

One of his first achievements was to persuade the Department of Industry to include Sinclair's Spectrum in the government's £9m "Micros in Primaries" scheme. The ZX81 was a notable absentee from the government's earlier scheme to put a micro in every secondary school.

"Just after I got back to the UK, before the Spectrum was announced in April, I heard rumours that the Department of Industry was going to announce a Primary Schools Scheme this summer," explains Searle. "We asked to show them our new computer. When we approached them they had actually made their choice of machines for the scheme, but they agreed that the Spectrum was suitable and decided to include it."

Searle also recognised the potential inherent in Prestel for micro users. A Prestel adaptor for the Spectrum should be launched early in the new year.


"Prestel is a great opportunity with a tremendous capacity, but has so few users," says Searle. "It isn't making headway because it is too expensive and difficult to use, but you have to consider not what benefit people get from it now but what they will get in the future. Kids will do more of their learning from computers and many people will work from home.

"As far as Sinclair is concerned, all these things mean that we shall be becoming more and more involved in writing and marketing software as a matter of strategy.

"The computers we are designing are becoming ever more complex and will be of little use without the software to run on them. The ZX81 is a learning machine. The Spectrum, with microdrives, is altogether different. Somebody is going to produce the software to go with it and it might as well be us!

"The profits to be made on software are high. The value of the product is its content, rather than the cost of the tape and container. It is obviously attractive for us to get into that. Besides, it is going to be increasingly difficult to make money out of the hardware. Already the business is becoming very cut-throat with so many new machines.

"In the past we have always sold our computers mail-order, but the market place is changing. We would not want to stand by and not give people the chance of choosing a Sinclair.

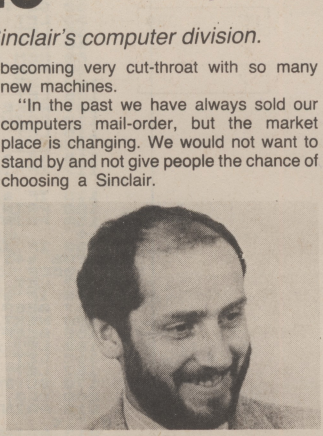

Nigel Searle – opening up new markets.

"We had an exclusive arrangement with W H Smith and there was a time when this was advantageous. But it did seem that many retailers were starting to sell microcomputers and we had to take advantage of that so we are now retailing the ZX81 through wholesalers, Prism Microproducts.

"We will retail the Spectrum sooner than we did the ZX81 because of the changing market. Besides, it will be easier to sell the Spectrum through those outlets already selling the ZX81 than it was to set these outlets up in the first place.

"Our machines are now being sold in the United States under the Timex banner. All the indications are that they are going to be extremely successful. Timex now have the largest share of the US market within six weeks of beginning to sell the Sinclair Timex 1000 and it seems very likely that they will become the dominant computer manufacturer.

"I would expect them to market a Spectrum-like product over there sooner rather than later. Their objective is to get in phase with us. We have the technology, and, if it is worth having, then it is worth having as soon as possible. I am sure that soon they will be selling products in the American market as soon as we can develop them.

"Sinclair Research is changing. It has always been a technology driven company with no great emphasis laid on exploiting the market. We will now sell not just by the most profitable route but by any route that is *sufficiently* profitable.

"As far as Spectrum deliveries are concerned I recognise that the customers are not satisfied. We have tried to respond with letters to those who have ordered the machines but it is very difficult.

"The scary thing about it was not simply that we weren't producing enough machines, but that we didn't seem able to control the numbers we produced even with relatively small numbers. We have not been able to predict with confidence how many we would produce in a week. This is what out customers could not accept — that we were just unable to tell them when they would get their machines.

"We can now do this. Production, while still not as high as we would like, is now smooth and regular, a far cry from three weeks ago. We'd be running along nicely producing *X* hundred a day and then suddenly we'd hit a problem. We have had difficulties with new suppliers and there have been design problems.

"On a day when we might have hoped to make 400 Spectrums we might have made only 40. The Ram expansion unit was the main problem and we are only now getting back to the sort of production levels we were at before Timex went on their annual three-week holiday in July.

"When they came back from holiday we all had high hopes. The Ram expansion board had been causing assembly problems, so we designed a new main printed-circuit board incorporating the Ram expansion. But the tracking on the new board was very fine and the tolerance of the whole job went down. In retrospect we might have been better advised to have stuck with the original boards.

"We of course have to accept responsibility for this — after all we got ourselves into the problem. But the customers didn't seem to understand that we didn't *know* when they would get their machines.

"I suppose I would have felt as they did if I had ordered one. I accept our mistake in having a product that could not be reliably produced. It may not seem so —



Remembering recent problems.

but we have spent an absolute fortune in customer service in the last few months — far, far more, I assure you, that any interest accruing from the money orders we have received.

"Now that there are signs that the production of the Spectrum is increasing, we can begin to think of new projects.

"Our design department has never been so strong. We obviously intend to go on producing new computer products. We have no plans to launch a new printer immediately but we shall be producing the microdrives for the Spectrum very early in the new year."

Ian Stewart and Robin Jones present a new series for beginners

Calling all branches

So far, our instruction set looks a bit thin. We have *Ld* and *St*, which will move things around memory, *Add*, which is pretty primitive arithmetic, and *Hlt* to stop the program.

We can pep up the arithmetic capability a bit by adding *Sub*, which will subtract the contents of a location from the A-register. But, there are no instructions for multiplication, division or the calculation of square roots.

What we really need is a set of branch instructions, equivalent to Basic's *If . . . Then . . .*

It is fairly easy to branch to an instruction out of the usual sequence, all you need to do is change the contents of the PC register. So we'll use an instruction like:

```
JP416          [jump to 416]
```

Whenever it is executed, it will put 416 in the PC. The system is "fooled" into thinking that the next instruction is in 416. Then it will go on to 417, 418, etc, until the next "jump" instruction is encountered. Of course, any address can follow the Jp opcode.

This instruction is more like a *Goto* than an *If . . . Then . . .* statement. What we need is an instruction which resets the PC only if some condition is met. The simplest test we can make is whether the A-register contains zero:

```
JPZ 2A7        [jump to 2A7 only if A-reg. contains 0]
```

Another would be:

```
JPN 14E        [jump to 14E only if contents of A-reg.
                are negative]
```

That is the minimum we can get away with, because we can now test for a positive (non-zero) number by noticing when the program doesn't jump on either *Jpz* or *Jpn* instructions.

Subroutines and Stacks


While on the subject of transferring control from one place to another inside the program, how about something like Basic's *Gosub* and *Return*?

We'll have an instruction:


```
CALL 205       [call the subroutine starting in 205]
```

which puts 205 into the PC, just like a *Jp* opcode. But, *Call* also performs a second function — it stores the address of the instruction after the *Call*, so that when a "return" (opcode: *Ret*) is encountered it can load the stored address back into the PC to continue the main program where it left off.


This is where the SP register comes in. We use some of the memory as a *stack* (remember stacks?) and SP points to the top of the stack. When a *Call* is obeyed, the return address (the address of the *Call* + 1) is pushed on to the stack. When the *Ret* is encountered the stack is popped into the PC. Here's an example:

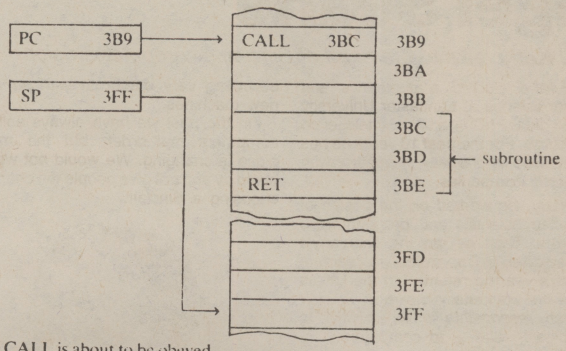

The CALL is about to be obeyed . . .

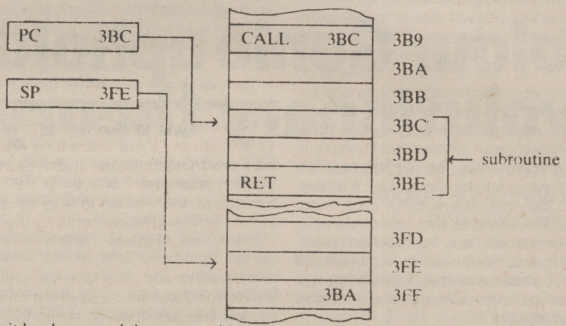


Now it has been, and the return address is on the stack. The program steps through the subroutine until it reaches the RET, after which:

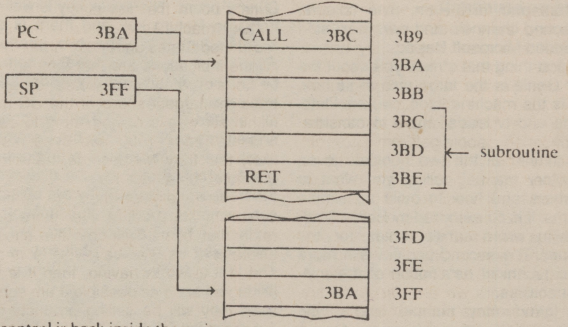

and control is back inside the main program.

Reproduced from *Machine Code and better Basic*, by Ian Stewart and Robin Jones (price £7.50), by kind permission of Shiva Publishing Ltd, 4 Church Lane, Nantwich, Cheshire CW5 5RQ.

If you have any machine code subroutines/tips/games, please send them to: Machine Code, *Popular Computing Weekly*, Hobhouse Court, 19 Whitcomb Street, London WC2 7HF.

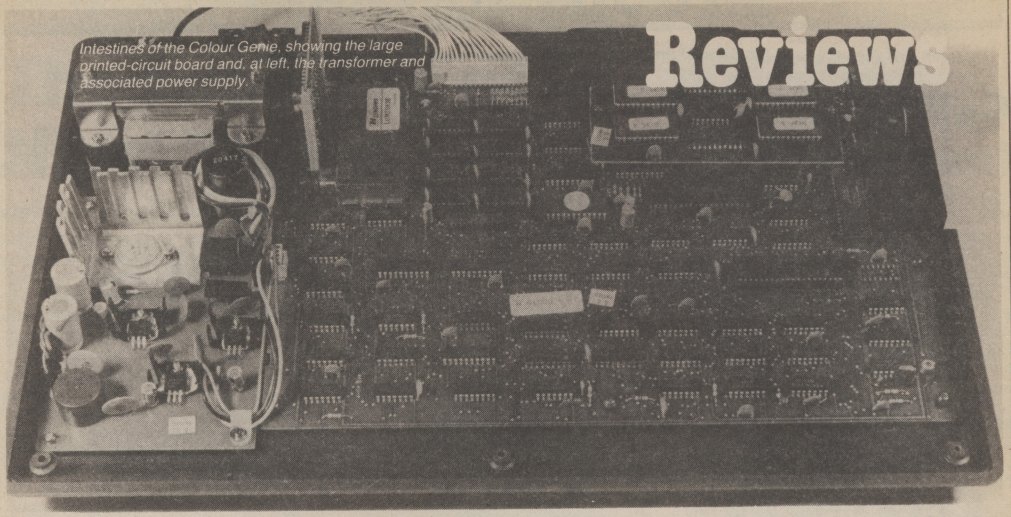

Intestines of the Colour Genie, showing the large printed-circuit board and, at left, the transformer and associated power supply.

Colour Genie upholds evolutionary theory

***David Kelly** finds that his wish is not always the Colour Genie's command.*

The Colour Genie is the natural successor to the Video Genie. Manufactured by EACA International in Hong Kong and imported by Lowe Electronics, the Colour Genie costs £199.

Like its EACA predecessors, the Colour Genie is based around the Z80 chip. It has 16K Rom and 16K Ram, nine colours, three sound channels and runs a version of Extended Microsoft Basic.

The first thing that strikes you about the Colour Genie is the large size of its box. Inside is the machine itself, two booklets, cassette and tv leads, and a demonstration tape.

The thinner of the two booklets is an introductory manual, telling you what to plug where and how to build up simple programs. It is co-authored by Robin Bradbeer who wrote similar notes for the Spectrum. The second booklet is a more detailed technical description of the micro's capabilities.

The introductory manual opens with "Congratulations on purchasing a Colour Genie microcomputer. You are now the proud owner of one of the most sophisticated personal computers available. Take the computer out of the box carefully and attach an appropriate plug to the mains lead." Unfortunately, you will not be able to find out just how sophisticated the Genie is if you have not already bought a plug.

Hardware

Removed from its protective foam packaging and set down on the dining room table the Colour Genie looms large. It is almost 1½ feet wide and 1 foot deep. The case consists of dark-brown and white plastic and is rather unimaginative.

The series of parallel grooves running up the right-hand side of the keyboard, incorporating the loudspeaker grill, are fictitious rather than functional — there is no speaker underneath. The machine's audio output is through the tv.

The keypad is a full-size, well laid out, Qwerty board. The Break key is well away from the Return key and there is a full-length space bar. The two interlocking *Reset* keys are a good idea — both must be pressed simultaneously before the system resets. It is a pity that *, = and + are all shifted symbols. The keyboard is angled in a similar way to the Commodore machines so that the 64 preprogrammed graphics characters can be displayed on the front of the keys. They are selected in conjunction with the *Control* function.

Unshifted letters are capitals. To get the lower-case letters the Shift key is used. The feel of the keys was not wholly to my liking — they depressed too far and were rather springy.

On the right of the keyboard are the four function keys. To the left is a neon light, to indicate if the machine is connected. There is an on/off switch at the back.

Also at the back are the tv output, Rom cartridge port, cassette input/output and monitor audio and video outputs. These latter outputs are useful but the choice of phono for the video output is unusual. The parallel and serial input/output ports and light-pen port are located on the right-hand side. The cassette, serial and light-pen sockets are all sensibly Din.

Before considering what the Colour Genie does with this hardware let us briefly look inside. The keyboard and top of the casing hinges away from the back. The transformer and associated power supply is on the left. Almost the whole of the Genie's circuitry is contained on one large printed-circuit board, which accounts for the bulky casing. There is a fair amount of excess space inside the machine — rather like the Dragon.

There are over 60 chips on the board including the Z80 processor, display chip and sound chip. Also on the board, at the power supply end, is the Pal colour UHF modulator. The pcb appears well constructed and the tracks on the board are reasonably solid.


Most new microcomputers these days have an external power supply to avoid possible overheating. Although the Colour Genie has an integral power supply it has an adequately heat-sink and, even after prolonged use, I could detect no such problem.

Software


The Colour Genie runs its own version of the now increasingly popular extended Microsoft Basic.

In the standard low-resolution graphics mode there are 24 rows and 40 columns. Information is directed onto the screen using the *Print @ n, "X"* command. X is the letter or figure to be printed and *n* can be any number between 1 and 960, corresponding to the 960 possible screen positions. (For example, if *n* is 40 this denotes the first character on the second line.) This is different from some other machines, where both the row and column have to be specified.

The low-resolution mode can define up to nine colours — black, white, green, red, yellow, orange, blue, cyan and magenta. These are formatted using *Colour N*, where *N* is 0 to 8.

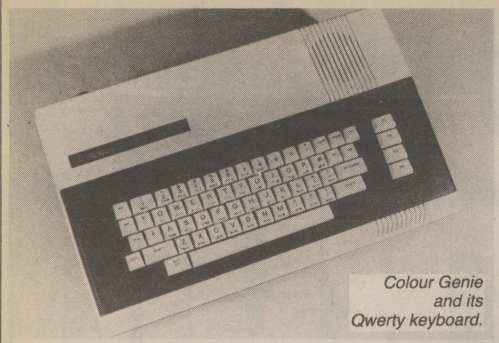

Colour Genie and its Qwerty keyboard.

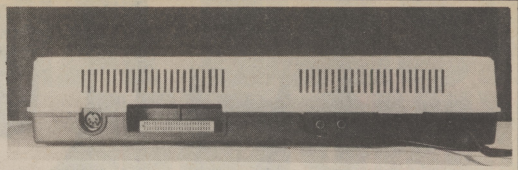

Back view (above) showing Rom cartridge, cassette and TV I/O ports.

The high-resolution mode is entered by depressing the *Control* and *Mode Select* keys simultaneously. Low-resolution is restored by pressing the keys again.

Alternatively, high-resolution mode can be called during a program using the command *Fgr*. Low-resolution is restored using the command *Lgr*.

All programming is carried out in the *Lgr* mode. When a program involving high-resolution graphics is run the other mode has to be switched in and out using the *Fgr* and *Lgr* commands. The cursor line is not visible in *Fgr* mode.

The high-resolution page is 160 × 80 and can be defined in four colours — black, blue, red and green. These are formatted by *Fcolor N*, where *N* is 1 to 4.

In the high-resolution mode there are several useful commands. *Plot X1,Y1 to X2,Y2* draws a line between two points. *Circle X,Y,R* draws a circle, centre at *X,Y* and radius *R*. *Shape X,Y* draws a figure, beginning at *X,Y* defined by the user with individual bytes determining up, down, left, right and the colours. *Paint X,Y,C,B* colours in a close contour starting at *X,Y* with the colour *C*, leaving the boundary of the painting area in the colour *B*.

Like the Dragon 32, graphics drawing and plotting is quick — much more so than the Spectrum.

A strange quirk of the machine I reviewed (and this may not be true of the production models) gave it a mid-Atlantic flavour: the low-resolution colour command is *Colour* while the high-resolution one is *Fcolor*, without the *u*. Another peculiarity is that the low-resolution mode uses a single number to define a point on the screen while the high-resolution mode uses *X,Y* co-ordinates.

The Colour Genie has some very sophisticated editing commands. These are used in conjunction with the four function keys and the cursor keys.

The function keys operate as four single-keyword entry keys to simplify editing. When depressed they give *List*, *Run*, *Auto* and *Edit*. The *Auto* key instructs the computer to write a new line number immediately after the return key is pressed.

The cursor keys ← and ↓ are straightforward, moving the cursor one space to the left — used as the delet key — and one line down. ↑ comes up on the screen as [and is the exponential key — it has nothing to do with the cursor. → moves the cursor, not one space to the right, but to the start of the next screen field or *Tab* location. This is sensible otherwise it would merely be a duplication of the space-bar.

A special feature of the Colour Genie allows the character, size and frequency of blinking of the cursor to be redefined to the user's preference.

The editing sequence is built around a set of operating key letters which can be used to change the existing text. First type in *Edit X*, where *X* is the line number of the line you wish to change. The computer enters the edit mode and the line to be changed is selected. Typing *L* brings the line down and displays it with the flashing cursor at its start.

Move the cursor along the line, using the space-bar or cursor keys, until the section to be changed is reached. At this point any number of edit-mode sub-commands can be applied.

Each of these sub-command letters is followed by the relevant correction to the text. The *C* key followed by an entry changes the character immediately after the cursor. The *I* key followed by an entry inserts a new character immediately after the one on which the cursor rests. The *D* key deletes the character after the cursor.

To aid editing, the character is only deleted when the changes are saved and the command mode is reinstated. During editing the deleted characters are still displayed but are shown flanked by two ! symbols.

Continued on page 22

Side view showing parallel and I/O, and light-pen ports.



THE THOUGHT PROCESSOR

MiCROL© SPECTRUM

USE AND LEARN VOL.1: 25 BASIC PROGRAMS AVAILABLE NOW

£9.95

USE 25 PRACTICAL BASIC programs you can put to work immediately–

Programs to demonstrate the wide-ranging potential of your 16 or 48K Spectrum:— World Atlas — Cassette and Videocassette Index — Music Composer — Computer Term Glossary — Star Maps . . .

Personal Programming Aids to help you write your own programs more effectively:— Memory Map Monitor — System Diagnostic — Program debugging aids . . .

Time-saving routines to use in your own programs:–

Text Editor — Flexible graph drawing routines — Sort and Search routines . . .

Plus much more.

And, of course, original games to entertain and challenge you.

LEARN New ways to get the most from your Spectrum. Over 100 pages packed with —

Powerful programming techniques:— use Structured Programming to save time and make your programs more reliable — Ideas to make your games more exciting — How and when to use trees, tables, sorts and searches (do you know the Monkey Puzzle sort?) . . .

Facts at your Fingertips:— Memory and runtime Benchmarks for every command — Display File Memory Map — Important PEEK and POKE locations you won't find in your Spectrum manual. Program Design Aids:–ScreenDesigners, for fast graphics and print layouts — Memory Manager, to keep track of every variable and array. PLUS:– All 25 BASIC programs explained line by line –a goldmine of practical hints and tips.

Send today for USE AND LEARN Volume 1– 25 BASIC Programs, and we'll also keep you posted with details of further important MiCROL products for your Spectrum. And USE AND LEARN comes with MiCROL's full 14-day money- back Guarantee.



To order simply complete the coupon, and FREEPOST with your cheque, made payable to **MiCROL** (UK Mail Order).

Despatch normally by return.

Telephone orders—credit card holders can order by telephoning **(0223) 312866** from 9-5.30 Monday to Saturday, stating name and address. Card No. Access/Barclaycard/Visa. and item(s) required.

THE DATA BASE

PRACTICAL. POWERFUL. RELIABLE. AND ONLY FOR 48K SPECTRUMS

AVAILABLE NOW £9.95

Whether you want to update mailing lists, re-organise the filing, or simply produce an index of your stamp collection, THE DATABASE makes it easy and enjoyable:

Easy-to-use one-touch commands and full onscreen prompts for fast, confident operation.

Down-to-earth 40-page manual — full operating instructions plus practical examples to show how THE DATABASE helps you in almost every work and leisure interest.

Massive storage capacity for real-work capabilities — over 900 screens of information (or over 7,000 names and addresses) on a single C90 cassette.

Advanced features you won't find on most £100 + databases — Machine-code automatic sorts and six kinds of searches (including Find Smith, Find Smith And Croydon, Find Smith or Croydon).

Performance you can depend on — professional design and testing ensures the reliability you need for storing important information.

And, with THE DATABASE, you get FREE MiCROL UserCare — informed, intelligent assistance and advice, whatever your question — by letter or telephone.



You can put THE DATABASE to work immediately. And as your Spectrum system grows, THE DATABASE will grow too, with low-cost MiCROL add-ons for Microdrives and full-size printers available soon.

AVAILABLE NOW! ONLY £9.95

Find out for yourself how THE DATABASE puts real computing power at your fingertips.

Send for THE DATABASE today, and we'll also keep you posted with details of further important MiCROL products for your 48K Spectrum. And THE DATABASE comes with MiCROL's 14-day money-back Guarantee.

To order simply complete the coupon, and FREEPOST with your cheque, made payable to **MiCROL** (UK Mail Order). Despatch normally by return.

Telephone orders—credit card holders can order by telephoning (0223) 312866 from 9-5.30 Monday to Saturday, stating name and address, Card No. Access/Barclaycard/Visa and item(s) required.

THE THOUGHT PROCESSOR

MiCROL© SPECTRUM

(0223) 312866

MAIL ORDER DISTRIBUTION EXCLUSIVELY BY TEMPUS OF CAMBRIDGE

38 Burleigh Street, Cambridge CB1 1BR.

Designed by Sesames (UK) Ltd

Post to:— **MiCROL (UK Mail Order) Freepost 38 Burleigh Street, Cambridge CB1 1BR**

Please send me ..... copy/copies of **THE DATABASE**

Please send me ..... copy/copies of **USE AND LEARN** Vol.1

I enclose cheque/P.O. for ..... (£9.95 + 50p p + p — £10.45 total each).

Or I wish to pay by Access/Barclaycard/Visa Card Number .....

Please print name and address

Name .....

Address .....

..... PCWk/10

Credit card holder's signature .....

Open Forum

Open Forum is for you to publish your programs and ideas.
It is important that your programs are bug free before you send them in. We cannot test all of them.
Contributions should be sent to: Popular Computing Weekly, *Hobhouse Court, 19 Whitcomb Street, London WC2H 7HF.*

How to contribute

Each week the editor goes through all the programs that you send to Open Forum in order to find the Program of the Week.

The author of that program will qualify for DOUBLE the usual fee we pay for published programs. (The usual fee is £10.)

Presentation hints

Programs which are most likely to be considered for the Program of the Week will be computer printed and accompanied by a cassette.

The program will be well documented, the documentation being typed with a double spacing between each line.

The documentation should start with a general description of the program and then give some detail of how the program has been constructed and of its special features.

Listings taken from a ZX Printer should be cut into convenient lengths and carefully stuck down on to white paper, avoiding any creasing.

Please enclose a stamped, self-addressed envelope.

Logic Circuit

on Spectrum

The program enables you to plot out a logic circuit on the screen using numerous facilities to aid you. All the logic circuit symbols are user defined, these symbols are for *And, Or, Not, Nand* and *Nor.*

The program does not have to be used for plotting logic circuits, as it could be used as a "sketch pad".

The programs facilities are:

Move cursor, slow or fast.
Plot in any colour.
Use logic symbols.
Save the screen display on tape.
Load a screen display from tape.
Draw a line from A to B.
Draw a circle with centre at cursor and input radius.
Clear screen.
Help.

Full instructions are included in the program.

```
  5 REM  LOGIC CIRCUIT PLOTTER
  6 REM  © ANDREW FILBY 1982
 10 GO SUB 9000
 15 GO TO 5000
 20 LET FL=0: LET k=9: LET l=10
0: LET p=0
 35 PRINT AT 0,6;"LOGIC CIRCUIT
 PLOTTER";AT 0,5; OVER 1;"_____
_____"
 40 PRINT "G=NAND=▶ ";CHR$ 8; OV
ER 1;" ▪   N=NOT=▶ ";CHR$ 8; OVE
R 1;" ▪   A=AND=▶ ";CHR$ 8; OVER
 1;" ▪   O=OR=▶ ";CHR$ 8; OVER 1;AT 2
0,0;"                "
 45 PRINT AT 20,0;"NOT PRINTING"
 50 PLOT k,l
 60 PRINT AT 21,15; INK 0;"POSI
TION=";k;" ";l;"  "
100 LET a$=INKEY$: IF a$="" THE
N GO TO 50
104 IF a$="K" OR a$="k" THEN IN
PUT "Input name of picture."; LI
NE n$: PRINT AT 21,0;
"                ";AT 0,6;n$: LOAD n$
SCREEN$
105 IF p=0 THEN PLOT OVER 1;k,l
106 IF a$="P" OR a$="p" THEN BE
EP .04,40: LET p=NOT p: PRINT AT
 21,0;("PRINTING" AND p=1)+("
NOT PRINTING" AND p=0)
107 IF a$="S" OR a$="s" THEN PR
INT AT 21,0;"Input name of pictu
re                ": INPUT "(10 chara
cters max)"; LINE n$: PRINT AT 2
1,0;"                ";AT
 0,0;"
";AT 0,10;n$: FOR m=10 TO
LEN n$: PRINT AT 0,m; OVER 1;"_"
: NEXT m: SAVE n$SCREEN$
108 IF a$="L" OR a$="l" THEN CL
S : GO TO 35
109 IF a$="1" OR a$="2" OR a$="
0" OR a$="3" OR a$="4" OR a$="5"
 OR a$="6" OR a$="7" THEN INK VA
L a$: BORDER VAL a$: BEEP .01,30
110 IF (a$="U" OR a$="u") AND l
<151 THEN LET l=l+1
120 IF (a$="Y" OR a$="y") AND l
>=10 THEN LET l=l-1
130 IF (a$="I" OR a$="i") AND k
<=254 THEN LET k=k+1
140 IF (a$="T" OR a$="t") AND k
>1 THEN LET k=k-1
150 IF a$="A" OR a$="a" THEN PR
INT AT (175-l)/8,33333-k/8;"▶"
160 IF a$="N" OR a$="n" THEN PR
INT AT (175-l)/8,33333-k/8;"N"
170 IF a$="N" OR a$="N" THEN PR
INT AT (175-l)/8,33333-k/8;"N"
180 IF a$="O" OR a$="o" THEN PR
INT AT (175-l)/8,33333-k/8;"▶";
OVER 1;CHR$ 8;".."
190 IF a$="U" OR a$="U" THEN PR
INT AT (175-l)/8,33333-k/8;"▷";
OVER 1;CHR$ 8;".."
191 IF CODE a$=82 AND K>8 THEN
LET k=k-8
192 IF CODE a$=172 AND K<240 TH
EN LET k=k+8
193 IF CODE a$=197 AND L<140 TH
EN LET l=l+8
194 IF CODE a$=198 AND L>20 THE
N LET l=l-8
195 IF a$="h" OR a$="H" THEN GO
TO 5000
196 IF a$="c" OR a$="C" THEN IN
PUT "Input name of picture."; LI
NE n$: PRINT AT 0,0;
"                ";AT 21,0;"
";AT 0,6;n$; COPY
197 IF a$="d" OR a$="D" THEN BE
EP .06,50: GO SUB 6000
198 IF A$="E" OR A$="e" THEN ST
OP
199 IF a$="Z" OR a$="z" THEN IN
PUT "Input radius of circle";ra;
IF ra>10 AND k+ra<255 AND l-ra
>10 AND l+ra<140 THEN CIRCLE k,l
,ra
200 GO TO 50
5000 REM INSTRUCTIONS-© A.FILBY
5004 PAPER 1: INK 7: BORDER 1: C
S
5010 PRINT AT 0,3;"Instructions-
©-Andrew Filby";AT 0,2; OVER 1;"
_____"
5020 PRINT '"To move the cursor(
a pixel)";AT 2,0; OVER 1;"_____
_____"
5030 PRINT '"T=left :Y=down :U=u
p :I=right"
5035 PRINT "For  extra  speed,
hold 'SYMBOLSHIFT' down aswell."
5040 PRINT '"COLOURS";AT 8,0; OV
ER 1;"_____"
5050 PRINT '"1=blue,2=red,3=mage
nta,4=green  5=cyan,6=yellow,7=w
hite,0=black"
5060 PRINT '"Symbols";AT 13,0; O
VER 1;"_____"
5070 PRINT '"A=AND=▶ ;  N=NOT=▶
 O=OR=▶           G=NAND=▶ ";CHR$
 8;" OVER 1;".  U=NOR=▶ ";CHR$ 8
;" OVER 1;"."
5080 PRINT '"PRINTING";AT 18,0;
OVER 1;"_____"
5090 PRINT '"P=Print  ON/OFF, L=
clear screen"
5100 PRINT AT 21,3; FLASH 1;"Pre
ss any key to continue."; BEEP .
02,(RND*100)-40: IF INKEY$="" TH
EN GO TO 5100
5110 CLS
5111 PRINT '"SAVING AND LOADING
";AT 2,0; OVER 1;"_____"
5120 PRINT '" S=SAVE PICTURE, K=
LOAD PICTURE"
5130 PRINT '"DRAW LINE";AT 6,0;
OVER 1;"
5135 PRINT '"POSITION CURSOR AT
START OF LINETHEN PRESS 'D'  ,POS
ITION CURSOR AT END OF LINE THEN
 PRESS 'D'  AGAIN AND THE LINE
WILL BE DRAWN"
5140 PRINT '"THE CURSOR POSITION
 WILL  BE  DISPLAYED AT  ALL
TIMES  FOR  SCREEN MAPPING."
5145 PRINT '"Draw circle";AT 17,
0; OVER 1;"_____"
5151 PRINT "Position cursor at c
entre,then  press 'Z' and input
radius."
5152 PRINT "                E = END"
5155 PRINT AT 21,0; FLASH 1;"Pre
ss any  key to continue."; BEEP .
02,(RND*100)-40: IF INKEY$="" TH
EN GO TO 5155
5160 INK 0: BORDER 0: PAPER 7: C
LS : GO TO 20
6000 IF FL=0 THEN LET K1=K: LET
L1=L
6010 IF FL=1 THEN DRAW K1-K,L1-L
: LET FL=0: BEEP .03,20: RETURN
6020 LET FL=NOT FL
6030 PLOT K,L
6100 RETURN
9999 STOP
9000 FOR f=144 TO 147: FOR g=0 T
O 7: READ a: POKE USR CHR$ f+g,a
: NEXT g: NEXT f
9010 RETURN
9100 DATA 0,0,0,BIN 00000111,BIN
 00000111,BIN 00000111,0,0
9110 DATA 0,BIN 01000000,BIN 011
00000,BIN 01110111,BIN 01111111,
BIN 01110111,BIN 01100000,BIN 01
000000
9120 DATA 0,BIN 11000000,BIN 011
00000,BIN 00110000,BIN 00111000,
BIN 00110000,BIN 01100000,BIN 11
000000
9130 DATA 0,BIN 11000000,BIN 111
00000,BIN 11110000,BIN 11111000,
BIN 11110000,BIN 11100000,BIN 11
000000
```

Logic Circuit
by Andrew Filby

40 Character Print

on Spectrum

This machine code program enables anyone with a 48K Spectrum to print on a 40-column line. The program merits a lengthy explanation. Suffice to say it dissects the character and plots it onto the screen, using the *Rom's Plot* routine. Each character is 6 pixels wide, rather than the normal 8 — so it requires a new character set. It is a good idea if you define your own on a 6 × 8 grid, leaving a space round the right and bottom to separate the characters. To save you having to do this until you have seen the program work, program 1 moves the old character set up, into *Ram,* trying to make it more suitable by

moving the "bits" of character one position left. Program 2 loads in the machine code. To print a 6 × 8 character:

```
1 POKE 64000,a: REM ASCII code of character
2 POKE 64001,b: REM the column times 6
3 POKE 64002,c; REM 175-8 times line
4 RANDOMIZE USR 63000
```

It is also possible to print over the lines, or set other widths for the characters by changing "b" in line 2 to "column times 'n'" and *Poke 63016*, 'n' ('n'=1 to 8). To make the ROM's PRINT use the new character set; POKE 23606,224: POKE 23607,250.

Program 1

```
10 CLEAR 62999
20 FOR X=256 TO 1144
30 LET A=PEEK (15360+X)
40 IF A>127 THEN LET A=A-128
50 POKE 64224+X,A*2
60 NEXT X
```

Program 2

```
10 CLEAR 62999
20 FOR X=63000 TO 63060
30 READ A
40 POKE X,A
50 NEXT X
60 DATA 38,0,58,0,250,111,41,41,41,17,224,250,25,
   6,8,14,6,86,203,34,220,60,246,13,0,0,0,
   32,245,35,0,0,0,16,236,201
70 DATA 245,197,213,229,42,1,250,62,6,145,
   133,79,120,132,71,205,229,34,225,209,193,
   241,201,201,201
```

```
   LD H,0
   LD A,(64000)
   LD L,A
   ADD HL,HL
   ADD HL,HL
   ADD HL,HL
   LD DE,64224
   ADD HL,DE
   ---------------
   LD B,8
a  LD C,6
   LD D,(HL)
b  SLA D
   CALL C,63036
   DEC C
   JR NZ b
   INC HL
   DJNZ a
   RET
```

Hex to Decimal

on Vic20

This program will probably be of most use to beginners. It will convert Hex to decimal. This is how it works.

Program notes:

```
  5 Power to convert Hex to decimal.
 10 Find Hex number to be converted to decimal.
 11 If the input is nothing then re-Run program.
 20 Put Hex number into A$.
 30 Last to first character of Hex number.
 35 Add one to power to convert Hex to decimal.
 36 If current character zero than goto line 40
    because zero=A$C 0.
 37 If current characters A$C value is 0 then go and
    convert it to number. N.B. If character is not
    number or is "0" A$C value=0. That is why line
    36 is needed.
 40 Converts current character in to decimal.
 45 Add value of current character to decimal number
    so far.
 50 Next character.
 60 Print result.
 70 Re-Run program.
100 Put current characters in to B$.
110 If B$ not letter between A and F then says it is
    illegal.
120 Converts letter to number.
130 Returns to loop.
```

```
  5 D=-1
 10 INPUT"HEX";HN$
 11 IF HN$=""THENRUN
 20 A$=HN$
 30 FOR A=LEN(A$) TO 1 STEP-1
 35 D=D+1
 36 IF MID$(A$,A,1)="0" THEN 40
 37 IF VAL(MID$(A$,A,1))=0 THEN 100
 40 B=VAL(MID$(A$,A,1))x(16↑D)
 45 C=C+B
 50 NEXT
 60 PRINT"DECIMAL"C"=HEX"HN$
 70 RUN
100 B$=MID$(A$,A,1)
110 IF ASC(B$)< 48 OR ASC(B$)> 70
THEN PRINT"ILLEGAL HEX NUMBER":RUN
120 B=ASC(B$)-55
130 GOTO 45
```

Hex to Decimal
by Matthew Saxon

```
PUSH AF
PUSH BC
PUSH DE
PUSH HL
-----------------
LD HL,(64001)
LD A,6
SUB C
ADD A,L
LD C,A
LD A,B
ADD A,H
LD B,A
CALL 8933 ROM's PLOT
-----------------
POP HL
POP DE
POP BC
POP AF
RET
```

by Paul Hampshire

Mini-maze

on Vic20

The player must move through a randomly generated maze to a star at the top of the screen in the shortest possible time. However, he may only move upwards and sideways — not backwards. If he crashes he receives five penalty seconds added to his time. Once only in the game the player may demolish the block in front of him, but this adds 10 penalty seconds to his time.

Keys used are:
'W', 'A' and 'D' to move;
'X' to demolish a block; and
'S' if you're stuck.

The main routines used in the 'Mini-Maze' program are:

1-60	Initialise variables
100-165	Draw maze
170-215	Test key pressed
240	Test if player has succeeded
300-307	Moves player up if no obstruction
310-317	Moves player left if no obstruction
320-325	Moves player right if no obstruction
330-420	Demolishes block in front of player
340	'Zap' sound effect
400-420	Explosion sound effect
500-690	End of game routine
610	Calculates time taken
700-794	Instructions
800-810	Given up routine
1000	Produces a randomly pitched 'beep'.

```
1 REM****************
2 REM*VIC MINI-MAZE*
3 REM*              *
4 REM*BY HUW EVANS  *
5 REM****************
8 HS=1000000000000
9 GOSUB700
10 S0=7680:S1=38400:V=36878
   :SG=36876:P=8176:P1=38896
   :F=0:EX=0
50 PRINT"■"
55 POKEV,15
100 FORI=1TO270
110 A=INT(RND(1)*500)
120 POKES0+A,160
130 POKES1+A,0
140 GOSUB1000:NEXT
150 PRINT"■
                "
155 POKE7690,42:POKE38410,2
160 FORI=8164TO8185:POKEI,3
    2:NEXT
165 POKEP,65:POKEP1,0:
    POKESG,0
167 T1=TI
170 GETA$:IFA$=""THEN170
180 G=0:IFA$="W"THENG=1
190 IFA$="A"THENG=2
200 IFA$="D"THENG=3
210 IFA$="X"THENG=4
215 IFA$="S"THENS00
220 IFG=0THEN170
230 ONGGOSUB300,310,320,
    330
240 IFPEEK(7690)=65THEN
    GOTO600
299 GOTO170
300 IFPEEK(P-22)=160THEN
    GOSUB400:RETURN
305 POKEP,32:P1=P1-22:
    P=P-22:POKEP1,1
307 POKEP,65:POKEP1,0:
    GOSUB500:RETURN
310 IFPEEK(P-1)=160THEN
    GOSUB400:RETURN
315 POKEP,32:P=P-1:P1=P1-1
317 GOTO307
320 IFPEEK(P+1)=160THEN
    GOSUB400:RETURN
325 POKEP,32:P=P+1:P1=
    P1+1:GOTO307
330 F=F+1:IFF>1THENRETURN
340 EX=EX+5:POKEV,15:
    FORM=180TO235STEP2:
    POKE36876,M:NEXTM:
    POKEP-22,32
350 POKE36876,0
400 POKE36877,220
```

to next page

```
410 FORL=15TO0STEP-1:POKEV,L
420 FORM=1TO100:NEXTM,L:POKE36877,0:POKEV,0:EX=EX+5:RETURN
500 POKEV,15:FORM=1TO20:POKE36876,180:NEXTM:POKE36876,0:POKEV,0:RETURN
600 PRINT"     SUCCESS!!!"
610 T2=TI-T1:T2=INT(T2/60)
620 PRINT"YOU TOOK"T2"SECONDS."
630 PRINT"YOUR PENALTY TIME IS:"EX"SECS.":T=EX+T2
640 PRINT"THEREFORE YOUR TOTAL  TIME IS"T"SECS."
650 IFT<HSTHENHS=T
660 PRINT"HIGH SCORE="HS"SECS."
670 PRINT"ANOTHER GAME?"
675 GETB$:IFB$="N"THENPRINT"":END
680 IFB$="Y"THEN10
690 GOTO675
700 PRINT"     VIC MINI-MAZE"
710 PRINT"STEER YOURSELF TO THE STAR AT THE TOP OF THEMAZE."
720 PRINT"CONTROLS ARE:"
730 PRINT"J - UP"
740 PRINT"H - LEFT"
750 PRINT"L - RIGHT"
760 PRINT"S - STUCK!"
770 PRINT"X - ZAPS THE BLOCK IN      FRONT OF YOU -CAN      ONLY BE USED ONCE"
780 PRINT"     (GIVES 10 PENALTY     PTS.)"
785 PRINT"  CRASHING-5 PEN.PTS!"
790 PRINT"PRESS ANY KEY TO START":GETB$:IFB$=""THEN790
794 GOTO10
799 END
800 PRINT"...SO YOU'RE NOT AS "
810 PRINT"CLEVER AS YOU THOUGHT!":GOTO670
999 POKEV,0:END
1000 POKESG,INT(RND(1)*128)+128:FORM=1TO10:NEXTM:RETURN
```

Minimaze
by Huw Evans

Spyplane

on BBC Micro

Spyplane is an arcade-type game with the novel feature of a guided missile, which helps you to dodge the stars which the plane flies through. The ',' and '.' keys move the base, 'Z', 'X' and 'C' move the gun-barrel and missile left, up and right respectively.

Press the space bar to fire and 'Q' to quit during the game. The program takes only 4K, but requires 20K graphics memory. Spyplane can be quite addictive.

Program notes:

100 to 160	Define characters for base, gun etc.
180 to 250	Print title page, removing cursor, and setting repeat delay and rate.
260	Envelope for explosion.
270	Envelope for escape of plane.
320	Remove cursor.
340 to 380	Border and score.
390 to 480	Draw stars, set position of plane and base.
500 to 700	Main loop.
520	Clear keyboard buffer.
530 to 580	Move base.
590 to 630	Change gun.
650 to 700	Move bullet and plane.
710 to 810	Procedure to move bullet.
720	Make sound based on height of missile.
730 to 750	Delete missile, ending if necessary.
760 to 810	Move and draw missile.
820 to 930	Procedures used by main routine.
940 to 1020	Move plane checking for hit.
1030 to 1290	More procedures used by main program.
1300	FNS — Resets graphics screen, and finds colour of a particular character using point.
1350	Explosion — putting a 7 in the pitch parameter of sound channel 0 (noise channel) allows channel 1 to control its pitch. Since *Envelope* 1 controls the pitch of channel 1, an explosion sound is produced.
1360 to 1420	Flash screen.
1430	Update score.
1460	Call *Envelope* 2 in channel as plane disappears.
1490 to 1740	Print score, high score and comment.
1750 to 1800	Ask if another game is wanted, if not go into Teletext and reset keyboard repeat delay and speed.

There is an error in the *Point* command. If it returns −1 it will, by looking at a co-ordinate off the screen, continue to do so even for legal co-ordinates until you enter VDU 26.

```
100  VDU 23,230,255,255,255,255,255,
255,255,0
110  VDU 23,233,255,255,255,255,255,
255,255,255
120  VDU 23,227,0,0,0,0,128,64,32,16
130  VDU 23,228,0,0,0,0,24,24,24,24
140  VDU 23,229,0,0,0,0,1,2,4,8
150  VDU 23,231,128,192,224,112,127,
255,255,111
160  VDU23,232,0,0,0,224,144,248,254,
255
170  HS=50
180  MODE2:VDU23;8202;0;0;0;
190  COLOUR130:CLS
200  COLOUR1
210  PRINT TAB(4,13);STRING$(12,
CHR$(233));TAB(4,17);STRING$(12,CHR$(233))
220  COLOUR 4
230  PRINT TAB(6,15);"SPYPLANE"
240  *FX 11,1
245  *FX 12,1
250  D=INKEY(500)
260  ENVELOPE 1,1,100,-1,-1,2,49,49,
0,0,0,0,0,0
127,-1,-1,255,126,20
270  ENVELOPE 2,1,100,-1,-1,2,49,49,
280  BULLET=1:HIT=0:SCORE=0:NM=0
290  REPEAT
300  B=21:FI=0:HB=0:PB=0:EN=0
310  MODE1
320  VDU 23;8202;0;0;0;
330  COLOUR1
340  FOR T=0 TO 39:VDU 31,T,0;233,31,
T,30;233:NEXT T
```

to next page

from previous page

```
350  COLOUR 2
360  PRINT TAB(1,31);"YOU'VE HIT ";
HIT;" SHIPS. YOU SCORE ";SCORE;
370  COLOUR 1
380  FOR T=1TO 30:VDU 31,0,T;233;31,
39,T;232:NEXT T
390  NS=RND(10)+15
400  G$=CHR$(228)
410  X=0
420  COLOUR 2
430  REPEAT PRINT TAB(RND(38),
RND(20)+1);"*";
440  X=X+1:UNTILX=NS
450  PH=RND(20)+1:PX=2
460  COLOUR 3
470  PRINT TAB(20,29);CHR$(230);
TAB(21,29);CHR$(230);TAB(22,29);CHR$(230);
480  PROCgun
500  FOR XX=1 TO 2
510  A$=INKEY$(0)
520  *FX 15,1
530  IF A$="" THEN650
540  OB=B
550  IF A$="," AND B>3 THEN B=B-1:
PRINT TAB(B+2,29)" ";
560  IF A$="." AND B<36 THEN B=B+1:
PRINTTAB(B-2,29);" ";
570  IF B=OB THEN 590
580  PRINTTAB(B-1,29);CHR$(230);TAB
(B,29);CHR$(230);TAB(B+1,29);CHR$(230);
590  IF A$="Q" THEN NM=7:UNTIL NM=7:
GOTO 1490
600  IF A$="Z" THEN G$=CHR$(227)
610  IF A$="X" THEN G$=CHR$(228)
620  IF A$="C" THEN G$=CHR$(229)
630  PROCgun
640  IF A$=" " AND FI=0 THEN FI=1:
PB=B:HB=27:B$=G$:BULLET=BULLET+1
650  IF FI=1 THEN PROCbullet:PROCgun:
ELSE PROCdelay
660  NEXT XX
670  IF EN=1 THEN UNTIL NM=7:
GOTO 1490
680  PROCship
690  IF EN=1 THEN UNTIL NM=7:
GOTO 1490
700  GOTO 500
710  DEFPROCbullet
720  SOUND 18,-10,HB,2
730  IF FNS(PB,HB,3,2)=2 THEN:
PROCdelete:FI=0:HB=0:ENDPROC
740  IF PB=PX AND HB=PH THEN
PROChit:FI=0:HB=0:ENDPROC
750  PROCdelete
760  HB=HB-1:PB=PB+(ASC(G$)-228)
770  IF FNS(PB,HB,3,2)=2 THEN FI=0:
HB=0:ENDPROC
780  IF FNS(PB,HB,3,2)=3 THEN
PROChit:FI=0:HB=0:ENDPROC
790  IF HB=0 OR PB=1 OR PB=39
THEN FI=0:ENDPROC
800  PROCdraw
810  ENDPROC
820  DEFPROCdraw
830  PRINT TAB(PB,HB);G$;
840  ENDPROC
850  DEFPROCdelete
860  PRINT TAB(PB,HB);" ";
870  ENDPROC
880  DEFPROCdelay
890  FOR I=1 TO 100:NEXT I
900  ENDPROC
910  DEFPROCgun
920  PRINT TAB(B-1,28);" ";G$;" ";:
ENDPROC
930  ENDPROC
940  DEFPROCship
950  IF (PB=PX OR PB=PX-1) AND HB=PH
THEN PROChit:FI=0:HB=0:ENDPROC
960  IF FNS((PX-1),PH,3,2)<>2
THEN PROCdeleteship ELSE PROCstar2
970  IF PX=38 THEN PROClose
980  PX=PX+1
990  IF PB=PX AND PH=HB THEN PROChit:
FI=0:HB=0:ENDPROC
1000  IF FNS(PX,PH,3,2)=2 THEN
PROCpassstar1 ELSE PROCshipfront
1010  IF FNS(PX-1,PH,3,2)=2 THEN
PROCpassstar2 ELSE PROCshipback
1020  ENDPROC
1030  DEFPROCshipfront
1040  PRINT TAB(PX,PH);CHR$(232);
1050  ENDPROC
1060  DEFPROCshipback
1070  IF FNS(PX-2,PH,1,5)=2 THEN
PROCstar2
1080  PRINT TAB(PX-1,PH);CHR$(231);
1090  ENDPROC
1100  DEFPROCdeleteship
1110  PRINT TAB(PX-1,PH);" ";
1120  ENDPROC
1130  DEFPROCstar
1140  COLOUR 2
1150  PRINT TAB(PX,PH);"*"
1160  COLOUR 3
1170  ENDPROC
1180  DEFPROCstar2
1190  COLOUR 2
1200  PRINT TAB(PX-1,PH);"*"
1210  COLOUR 3
1220  ENDPROC
1230  DEFPROCpassstar1
1240  VDU 31,PX,PH;232;18,0,2;5;31,PX,
PH;42;4;18,0,3
1250  ENDPROC
1260  DEFPROCpassstar2
1270  IF FNS(PX-2,PH,0,2)=3 THEN
PROCshipback:ENDPROC
1280  VDU 31,PX-1,PH;231;18,0,2;5;31,
PX-1,PH;42;4;18,0,3
1290  ENDPROC
1300  DEFFNS(X1,Y1,N1,N2):VDU26:A=
```

turn to page 20

PROGRAM OF THE WEEK

from previous page

```
POINT((X1%*8+N1)*4,((31-Y1)*8+N2)*4)
1310  =A
1320  DEFPROChit
1330  PRINT TAB(HB,PB);" ";
1340  PROCshipfront:PROCshipback
1350  HIT=HIT+1:SOUND 17,1,1,20:
SOUND16,-15,7,20
1360  FOR A=1 TO 16
1370  VDU 19,3,(A MOD 8)*2,0,0,0
1380  VDU 19,2,(A MOD 2)+1,0,0,0
1390  VDU 19,1,(A MOD 2)*5+1,0,0,0
1400  VDU 19,0,ABS((A MOD 2)-2),0,0,0
1410  FOR B=1 TO 20:NEXTB
1420  NEXT A
1430  SCORE=HIT*10-BULLET*2-NM*10
1440  EN=1:ENDPROC
1450  DEFPROClose
1460  SOUND17,2,10,10
1470  NM=NM+1
1480  GOTO1430
1490  MODE 1
1500  IF SCORE>HS THEN HS=SCORE
1510  VDU 19,0,4,0,0,0:19,3,2,0,0,0
1520  PRINTTAB(1,1);"Your score = ";
SCORE;"  -  ";
1530  IF SCORE<0 THEN PRINT"FAILURE"
GOTO 1690
1540  IF SCORE<40 THEN PRINT"AWFUL":
GOTO 1690
1550  IF SCORE<70 THEN PRINT"UTTERLY
DISGRACEFUL":GOTO 1690
1560  IF SCORE<100 THEN PRINT"
APPALLING":GOTO 1690
1570  IF SCORE<140 THEN PRINT"
VERY BAD":GOTO 1690
1580  IF SCORE<180 THEN PRINT"
BAD":GOTO 570
1590  IF SCORE<220 THEN PRINT"
O.K.":GOTO 1690
1600  IF SCORE<250 THEN PRINT"
GOOD":GOTO 1690
1610  IF SCORE<300 THEN PRINT"
VERY GOOD":GOTO 1690
1620  IF SCORE<350 THEN PRINT"
EXCELLENT":GOTO 1690
1630  IF SCORE<400 THEN PRINT"
WONDERFUL":GOTO 1690
1640  IF SCORE<500 THEN PRINT"
BRILLIANT":GOTO 1690
1650  IF SCORE<600 THEN PRINT"
BIONIC":GOTO 1690
1660  IF SCORE<750 THEN PRINT"
WONDER WOMAN":GOTO 1690
1670  IF SCORE<1000 THEN PRINT"
HYPER SLICK":GOTO 1690
1680  PRINT"CHEAT"
1690  PRINT''" You have lost your
secrets to the enemy"
1700  PRINT "...and have been made
redundant by a "''
1710  PRINT "computer Programmer."''
1720  VDU 19,2,12,0,0,0
1730  COLOUR2
1740  PRINT''" The high score is now
",HS,".";
1750  PRINT''" Do you wish to try to
regain your job?";
1760  A$=GET$
1770  IF A$="Y" THEN 280 ELSE IF
A$<>"N" THEN 1760 ELSE MODE 7
1780  *FX11,50
1790  *FX12,0
1800  END
```

Spyplane
by Colin Stark

Dicethrower

on BBC Micro

Many games involving chance are based on the throwing of dice. All too often, the computer version simply generates a random number between 1 and 6, and responds with a rather boring message.

A game programmed in this way misses the thrill of actually seeing the dice land, and interpreting their pattern of spots. This routine, which can easily be incorporated into any of your dice-based games, will display the dice in any chosen colour, at the positions you specify.

Your main program needs to call two procedures:

PROCSETUPCHRS, which should be called once only, at the start of the game, consists of a series of VDU 23 calls to define characters, each of which is one quarter of a die face.

PROCDICE is called each time your program wants one die thrown. It sets the resident integer variable A% to a random number between 1 and 6 — your main program will probably want to use this to determine what to do next.

PROCDICE then assembles the four defined characters which make up the randomly determined die face, and prints the face at the position specified in X%, Y%, in the colour specified in colour%.

That's the formal description — but why don't you just try it?

```
10 REM ***DICE-THROWING ROUTINE***
20 REM *  by Mike Berry         *
30 REM ***************************
40 REM
50 REM ***Start of your program***
60 PROCSETUPCHRS
70 MODE1
80 PROCDICE(10,10,3)
90 PROCDICE(13,10,1)
100 END
110 REM ***End  of your  program***
120 DEFPROCDICE(X%,Y%,colour%)
130 COLOUR (colour%)
140 A%=RND(6)
150 ON A% GOTO 160,210,260,310,360,410
160 CH1$=CHR$(232)
170 CH2$=CHR$(238)
180 CH3$=CHR$(239)
190 CH4$=CHR$(233)
200 GOTO450
210 CH1$=CHR$(234)
220 CH2$=CHR$(235)
230 CH3$=CHR$(236)
240 CH4$=CHR$(237)
250 GOTO450
260 CH1$=CHR$(232)
```

to next page

from previous page

```
270 CH2$=CHR$(229)
280 CH3$=CHR$(230)
290 CH4$=CHR$(233)
300 GOTO450
310 CH1$=CHR$(234)
320 CH2$=CHR$(240)
330 CH3$=CHR$(241)
340 CH4$=CHR$(237)
350 GOTO450
360 CH1$=CHR$(228)
370 CH2$=CHR$(229)
380 CH3$=CHR$(230)
390 CH4$=CHR$(231)
400 GOTO450
410 CH1$=CHR$(224)
420 CH2$=CHR$(225)
430 CH3$=CHR$(226)
440 CH4$=CHR$(227)
450 PRINTTAB(X%,Y%);CH1$;CH2$;TAB(X%,Y
%+1);CH3$;CH4$
460 VDU20
470 ENDPROC
480 DEF PROCSETUPCHRS
490 VDU23,224,255,128,152,152,128,128,
128,152
500 VDU23,225,255,1,25,25,1,1,1,25
510 VDU23,226,152,128,128,128,152,152,
128,255
520 VDU23,227,25,1,1,1,25,25,1,255
530 VDU23,228,255,128,152,152,128,128,
128,129
540 VDU23,229,255,1,25,25,1,1,1,129
550 VDU23,230,129,128,128,128,152,152,
128,255
590 VDU23,234,255,128,152,152,128,128,
128,128
600 VDU23,235,255,1,1,1,1,1,1,1
610 VDU23,236,128,128,128,128,128,128,
128,255
620 VDU23,237,1,1,1,1,25,25,1,255
630 VDU23,238,255,1,1,1,1,1,1,129
640 VDU23,239,129,128,128,128,128,128,
128,255
650 VDU23,240,255,1,25,25,1,1,1,1
660 VDU23,241,128,128,128,128,152,152,
128,255
670 ENDPROC
560 VDU23,231,129,1,1,1,25,25,1,255
570 VDU23,232,255,128,128,128,128,128,
128,129
580 VDU23,233,129,1,1,1,1,1,1,255
```

Dicethrower
by Mike Berry

Better than Basic



Can you program in a computer language other than Basic?

Enter this challenging new competition and win a Jupiter Ace.

Basic, for all its advantages, is slow. Programs written in Basic tend to look rather pedestrian when compared to programs written in some other languages such as machine code.
We want something different, something faster than Basic. It could be machine code, Forth, Lisp, Pascal or Fortran. In fact, your entry can be written in anything that is not Basic. And the best non-Basic program, be it game, utility or other, will win the Jupiter Ace.

The entries will be judged by *Popular Computing Weekly* editor, Brendon Gore, and Jupiter Ace designers Richard Altwasser and Steve Vickers. In their selection account will be taken both of the standard of the program and of the accompanying documentation. The whole range of languages and types of program are allowed. The only stipulation is that it must not be written in Basic.

Entries to the award scheme must be accompanied by four of the numbered coupons published in *Popular Computing Weekly* throughout October. The closing date for the competition is November 18. The winning entry will be announced in the issue published on December 23.

Rules

1. *There is no limit on the number of entries you can send in, but each entry must be accompanied by four differently numbered competition coupons.*
2. *Closing date for entries is November 18, 1982.*
3. *The names of the winners will be announced in the December 23 issue of Popular Computing Weekly.*
4. *The Judges' decision is final.*
5. *No employees of Sunshine Publications Ltd, or their families, will be eligible to enter the competition.*

Popular Computing Weekly
Better than Basic Competition

Fill in this coupon. When you have collected four differently numbered coupons, send them with your program to: *Popular Computing Weekly*, Better than Basic, Hobhouse Court, 19 Whitcomb Street, London WC2.

NAME: .....

ADDRESS: .....

.....

.....

.....

2

from page 13

These are the main editing sub-commands but here are just some of the others. *L* lists the remainder of the line and returns the cursor to its start. *X* incorporates both the *L* and *I* sub-commands. *A* cancels any changes so far indicated and returns the cursor to the start of the line. *E* ends the editing mode, saves the changes and reinstates the command mode. *Q* reinstates the command mode but cancels all the changes made.

The Colour Genie is capable of handling up to 128 user-defined characters. For each of these the ASCII code is constructed in an 8 × 8 format within eight memory locations. The 128 characters are stored in the locations between F4OOH and F7FFH.



Sound on the Colour Genie is a far cry from the subdued *Beep* of the Spectrum. It has three voices, each of which can play any of 11 notes (or a rest) in eight octaves at any of 15 volumes. In the latter case the command is unnecessarily subdivided — some of the 15 variations are not easily distinguishable.

The sound capabilities are flexible, but their initiation is somewhat cumbersome. Sound is produced by the *Play (C,O,N,V)* command, where *C* is the channel, *O* is the octave, *N* is the note and *V* is the volume. Before the *Play* command can be used the sound routines must be accessed with the command *Sound 7,248*. After use they must be terminated using the command *Sound 7,255*. The duration of any note has to be determined by a *For-Next* loop.

Errors on the Colour Genie are signalled with a useful selection of error messages. In many microcomputers mistakes are indicated by the unhelpful and all-embracing *Syntax Error*. The Genie identifies 23 separate faults with different error codes.

Summary

With so many microcomputers selling at around the £200 mark, it is difficult to see any features that make the Colour Genie stand out from the crowd.

Twelve months ago the Colour Genie would have been outstanding. Now there is the Dragon 32, which offers more or less the same facilities, and the Spectrum which is not as flexible but £75 cheaper. Other competitors include the BBC Micro and the Lynx which are more expensive but have more potential for expansion.

The Colour Genie is a sophisticated machine at a realistic price. But, it will find it difficult to break into a market dominated by established micros with similar capabilities.

In this slot various contributors explore different aspects of the ZX Spectrum

Deus ex machina

***Andrew Pennell** reveals some of the secrets hidden in the Spectrum Rom.*

The 16K Spectrum Rom contains many routines that can be used by the Basic programmer as well as by the adept machine code addict. For example, it is often useful to find out how long it takes for a key to be pressed. This can be achieved by *Peeking* and *Pokeing* the frames variables, as mentioned in chapter 18 of the manual.

However, it is much easier to use a line such as *Let T = 7997 − Usr 7997*. When this line is encountered, the program will wait (for up to 2 mins, 40 secs) until a key is pressed. T will contain the time taken, in 50ths of a second. The ZX81 *Scroll* function can be simply executed by the line *Randomize Usr 3582*. Incidentally *Randomize Usr 3213* will ask you 'scroll?' in the usual way, beforehand.

When a program ends, the uninteresting message '0 OK, 100:1' or a similar uninteresting message appears. For a bit of variety, make the last line of your program *Randomize Usr 4757*, and the words '© Sinclair Research Ltd' will appear in the current print position. The program will then wait for you to press a key before the usual 'OK' appears. Alternatively *Randomize Usr 4750* will print it in the same place as it does after a *New*.


It is possible to print on the two lower lines by using a statement such as *Print# 0*; ''message''; but beware of unexpected scrolling. The addition of *At* 0,0; in *Print* and *Input* statements will help.

Although *Inkey$* is useful in reading the keyboard, it can be awkward if any of the shift keys are held down. A line such as *Let a$ = Chr$ Peek 23556* will rectify the problem, as *a$* will contain the upper-case of the current key being pressed, ignoring shift keys of L mode. If no keys are pressed, this returns the value *Chr$ 255*. If both shift keys are held down, this function and *Inkey$* will return the value *Chr$ 14*.

After running a colourful program, or breaking into it, listings will appear in the current colours. This is difficult, if not impossible, to read with certain combinations, particularly if the *Paper* colour is the same as the *Ink* colour. To return to normal, it is usual to enter the statement *Ink 0:Paper 7:Bright 0:Flash 0*. This can be replaced with the much more manageable *Poke 23693,56*.

When listing a long program, and presented with 'scroll?', press *Shift 3* or *Shift 4*. Two screenfuls of listing will scroll by before the next 'scroll?' appears, speeding up the process.

Finally, the program in listing 1 alleviates a recurrent problem in published ZX Printer listings of Spectrum programs — that of deciding which characters are user-defined graphics, and which are not. It converts each graphic character into its lower-case equivalent, and puts a black border around it. When the program has run, the characters should be saved on tape, using the technique on page 147 in the manual. The user defined graphics can then be loaded back before a program is *Llisted* for submission to this, or any other magazine.

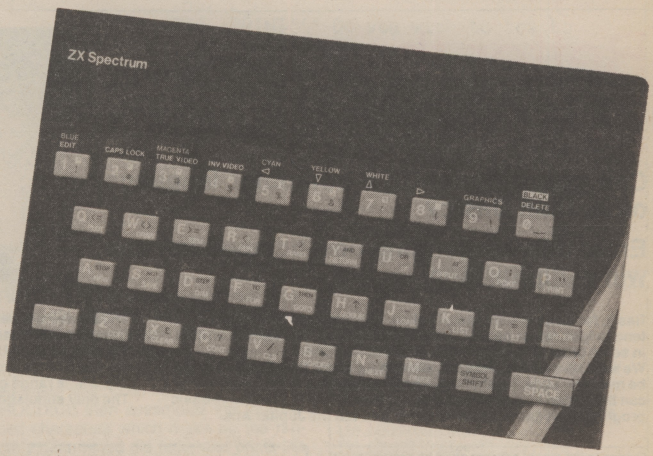

Sinclair's ZX Spectrum.

Listing 1


```
10 FOR I = 97 TO 117
20 LET A$ = CHR$ I
30 POKE USR A$,255 : POKE USR A$ + 7,255
40 FOR J = 1 TO 6
50 POKE USR A$ + J,129 + PEEK (15360 + 8 * I +
   J)
60 NEXT J
70 PRINT CHR$ (47 + I); " ";
80 NEXT I
```

Switch control to your joystick

***Peter Wilson** explains how to convert Vic20 programs for use with a joystick.*

Having bought a joystick for my Vic20, I decided to convert my existing games programs to work using commands from the joystick, rather than from the keyboard.

Where the program only requires Up, Down, Left, Right and Fire, the conversion is quite straightforward. The joystick is set up as in the figure below:



Switches 0, 1, 2 and 4 are controlled by Data-Direction Register (37139) and Output Register A (37137). Switch 3 is controlled by Data-Direction Register (37154) and Output Register B (37152).

The joystick can be made to control the movement, perfectly, using the following lines:

```
10 POKE 37139,0: POKE 37154,127 (Sets Data-
   Direction Registers)
20 U = PEEK (37137)                (Register A)
30 U0 = ((U AND 4) = 0)            (Switch 0)
40 U1 = -((U AND 8) = 0)           (Switch 1)
50 U2 = ((U AND 16) = 0)           (Switch 2)
60 U4 = ((U AND 32) = 0)           (Switch 4)
70 W = PEEK (37152)                (Register B)
80 U3 = -((W AND 128) = 0)         (Switch 3)
90 POKE 37154,255                  (Restores keyboard)
```

If the joystick is not moved, all the variables (U0, U1, U2, U3 and U4) will have the value of 0. When the joystick is moved the variable in the direction of the movement will then have the value of 1 or −1. The following lines will then respond to movement:

```
100 IF U0 < > 0 THEN PRINT"UP"
110 IF U1 < > 0 THEN PRINT"DOWN"
120 IF U2 < > 0 THEN PRINT"LEFT"
130 IF U3 < > 0 THEN PRINT"RIGHT"
140 IF U4 < > 0 THEN PRINT"FIRE"
```

All the programs I have converted used the statement *IF A$ = Y THEN Z or IF PEEK (X) = Y THEN Z.*

To convert these lines just substitute any one of the lines from Line 100 to Line 140. For example, *IF A$ = Y THEN Z* becomes *IF U3 < > 0 THEN Z; IF PEEK (X) = Y THEN Z* becomes *IF U2 < > 0 THEN Z.*

The only difficulty is encountered when wishing to move at an angle. Assigning values to all eight directions and Fire is slow and uses a lot of memory. A better method is to change two switch values when moving at an angle. For example, to move Up and Right set U0 = −1 and U3 = 1.

When all eight directions are needed add the lines:

```
150 IF U0 < > 0 AND U2 < > 0 THEN PRINT "UP
    AND LEFT"
160 IF U0 < > 0 AND U3 < > 0 THEN PRINT "UP
    AND RIGHT"
170 IF U1 < > 0 AND U2 < > 0 THEN PRINT
    "DOWN AND LEFT"
180 IF U1 < > 0 AND U3 < > 0 THEN PRINT
    "DOWN AND RIGHT"
```

These commands can now be used in a simple *Joystick Drawing* program. The program is written for the unexpanded Vic20. It lets you draw shapes or patterns, starting from the middle and then in any of the eight directions of the joystick.

Line 30 sets the block co-ordinates. Line 40 pokes blocks. Line 50 records the position of the last block. Lines 60 to 220 set the joystick and react when the joystick is moved. Line 230, if the fire button is pressed then the screen is cleared and the program starts again. Lines 250 and 270 check that the co-ordinates have not gone off the screen. If this happens the co-ordinates will be reset to the position of the last block. Press the *Run/Stop* key to stop the program.

```
1 REM JOYSTICK DRAWING
5 REM P.E.WILSON
10 POKE36879,25:POKE36869,240
20 CLR:PRINT"■"
30 X=7932:Y=38652:Z=10:V=11
40 POKEX,160:POKEY,0
45 FORW=1TO200:NEXT
50 XX=X:YY=Y:ZZ=Z:VV=V
60 POKE37139,0:POKE37154,127
70 U=PEEK(37137)
80 U0=((UAND4)=0)
90 U1=-((UAND8)=0)
100 U2=((UAND16)=0)
110 U4=((UAND32)=0)
120 U=PEEK(37152)
130 U3=-((UAND128)=0)
140 POKE37154,255
150 IFU0<>0ANDU3<>0THENX=X-21:Y=Y-21:Z=Z+1:V=V-1:GOTO250
160 IFU1<>0ANDU3<>0THENX=X+23:Y=Y+23:Z=Z+1:V=V+1:GOTO250
170 IFU1<>0ANDU2<>0THENX=X+21:Y=Y+21:Z=Z-1:V=V+1:GOTO250
180 IFU0<>0ANDU2<>0THENX=X-23:Y=Y-23:Z=Z-1:V=V-1:GOTO250
190 IFU0<>0THENX=X-22:Y=Y-22:V=V-1:GOTO250
200 IFU1<>0THENX=X+22:Y=Y+22:V=V+1:GOTO250
210 IFU2<>0THENX=X-1:Y=Y-1:Z=Z-1:GOTO250
220 IFU3<>0THENX=X+1:Y=Y+1:Z=Z+1:GOTO250
230 IFU4<>0THEN20
240 GOTO60
250 IFZ<00RZ>21THENX=XX:Y=YY:Z=ZZ:V=VV
270 IFV<00RV>22THENX=XX:Y=YY:Z=ZZ:V=VV
280 GOTO40
```

Classified

BBC "ALPHABETA"

A complete word processing package with instantaneous response. Features include insert, right justification, tabs, centring and merging. Model B only £28.50. Send s.a.e. for details. Cheque/P.O./Transcash No. 61 413 1707, H & H Software, Dept. W, 53 Holloway, Runcorn, Cheshire.

ZX81, new rom, £8. Thurnal I/Output board, £9. Various cassette programs and books on Basic.
Details: R. Pyatt
23 Arundel Drive
Orpington, Kent

T199/4A SOFTWARE on tape, from £1.95. Sae list ATL, 115 Crescent Drive South, Brighton BN2 6SB.

SPECTRUM GAMES. Falklander, Rentman, Bandit on tape. 48K Super, £3 each or £5 two, £8 all three. Jeff Duncan-Dunlop, 1 Dan-Y-Lan, Aberkenfig, Nr Bridgend, Mid Glamorgan CF32 9AB.

VIC20 CASSETTE UNIT Super Expander +3K Ram Joystick if wanted and software £200 ono. Tel: 073 082 2872.

VIC20 SUPER EXPANDER, Joystick, cassette, software, £230, all boxed. Tel: Workington 5622.

ZX81 UK economic model game, £2.95. Nottingham 819328 after 5 pm.

MATTEL INTELLIVISION GAMES UNIT with 12 cartridges, £250. Tel: Workington 5622.

16K ZX81, DK'tronics, graphics Rom and software, £70. Telephone 0953 860723.

DRAGON 32: Programs including Earth Defence, bars, Crosshatch, Swapshap, Titles, Moire, Visibubble. Cassette only £2.95 inc p & p. Video Productions, 1 Flordon Road, Newton Flotman, Norwich.

VIC GAMES. Compendium 1: Air-Attack, Deathtrack, Demolition, Target-blast, Execution, Fishing, Budgie-Catch, Dropstop, Hamurabi, Duck-shoot with colour, sound and hi-res graphics, runs in 3.5K, only £5. From P. Hudson, 43 Hillcrest Drive, Beverley, N. Humberside.

ZX81, with case and keyboard, 4K Ram pack, £48. L. Vekaria. 01-202 6410 (after 5.30 pm).

ZX81 16K RAM, tape inc defender and books 7 months old, £70. Ring 01-464 5085.

ATARI 800 16K six weeks old still under two year guarantee plus program recorder, pair of joysticks, star raiders cartridge plus other software, £460. Tel: Symington, Ayreshire 830176.

ZX81 16K in original package with motherboard, soundboard, video inverter plus books and tapes, £90. Telephone 01-979 0682. Steve.

ZX 81 64K, only 5 months old, full size 54 qwerty Crofton keyboard, many games books etc, £160. 01-228 3546.

BOOKS FOR DRAGON 32
AND TANDY COLOUR COMPUTER
101 Colour Computer Programming Tips and Tricks **£6.95**
55 Colour Computer Programmes, Home School, Office **£6.95**
55 more Programmes, Home, School, Office **£6.95**
The Colour Computer Songbook 40 songs **£5.95**
My Buttons are Blue (Poetry Generator) **£3.95**
Colour Computer Graphics **£7.95**
Other books for: PC1211, PC1500, Casio FX702 and Apple
Please add **50p** per book post and packing maximum **£1.50**
Sole UK agents. Dealer enquiries welcome
ELKAN ELECTRONICS
Free post (No stamp required)
28 Bury New Road, Prestwick,
Manchester M25 6L2
Tel: 061 798 7613. Prestel No. 258 2022

STARTING FORTH by Leo Brodie, £13.75 including p & p. Access/Barclaycard 0923-23324. Come and brose or send sae for lists. Watford Technical Books, 105 St Albans Road, Watford, Herts.

SPECTRUM RENUMBER. Instantly renumbers all or part of program. All Gotos, Gosubs, etc. included. The first and probably the best in M/C for only £3.95. David Webb, Southolme, 9 Park Road, Woking, Surrey.

40 SPECTRUM PROGRAMS. Listings only £4.95 including many games, home finance, maths, chequebook, utility programs and more. All 40 programs on cassette, £8.95 (incl listings), Barclaycard accepted. Sussex Software, Wallsend House, Pevensey Bay, Sussex.

16K SPECTRUM, Nuclear Effects Suite — know the facts — input bomb size, type, distance and wind strength, outputs blast and radiation effects at your location, £3.95. Softech, 33 The Uplands, Newcastle NE3 4LH.

ZX81 USER DEFINED GRAPHICS BOARD. Fits inside case, up to 64 characters plus inverses, full instructions, £19.95 inclusive. D. Hutchison (Circuits), 103 Vicarage Wood, Harlow, Essex.

WANTED PCWs 2/6/7/11. Can you help? Dave Strickland, 20 Mutual Street, Doncaster DN4 0EF. Tel: 62578.

VIC COMPUTER, plus 3K extra memory plus cassette deck with games and books, £200 ono. Tel: 3484454.

PLAY NOUGHTS AND CROSSES against the computer or with a friend for 32K Pet. Send cheque or P.O. to A. Knox-Hooke, 88c Hillfield Avenue, London N8.

SWAP VIC20, cassette, joystick and software for Sharp MZ80K. Ring Colne 866386.

ZX SPECTRUM 16K plus printer and spare rolls plus 5 arcade cassettes, £190. Telephone Towcester 51147 evenings.

50%!! 50%!! royalties paid for Vic, Acorn Atom. New company opening. Send SAE for details/catalogue. C. P. White, c/o Amini Distribution, 64 Madeley Road, Ealing, London W5 2LV.

BBC MICROCOMPUTER model 'A' 32K Ram plus cassette lead and software, only £340. Maidstone 681827.

NEW GENERATION SOFTWARE
from the author of
3D MONSTER MAZE
and **3D DEFENDER**
for the ZX81 comes a game for the 16K
SPECTRUM
ESCAPE — Can you escape from the maze inhabited by five dinosaurs including a TRICERATOPS, who hides behind the hedges and a PTERANODON, who soars over the maze to swoop down on you?
Please send **£4.95** to:
NEW GENERATION SOFTWARE (Dept PCW)
FREEPOST (no stamp required)
OLDLAND COMMON, BRISTOL BS15 6BR

SPECIAL OFFER!!
the new DRAGON 32
Get switched on to a 6809E colour cpu with hi-res graphics and quality keyboard!
Just **£195** inc VAT (+ delivery **£2**)
OR
Send your working ZX81 and £175 to us instead, before Clive cuts the price again (?)
H. COOMBS
4 Northgate Drive, Camberley, Surrey GU15 2AP

REALISTIC AIRCRAFT SIMULATOR in Basic for 16K ZX81. Land your aircraft on instruments only then design another one! £3 complete. From R. Cordiner, 226 Heeley Road, Birmingham B29 6EN.

BBC EARTH BLOCKADE (state A/B) only £2. M. A. Paris, 38 Wooburn Manor Park, Wooburn Green, Bucks.

ZX81 PROGRAMMERS'. Exchange: "Basic Tricks" and program, SAE plus 10p stamp. Nick Godwin, 4 Hurkur Crescent, Eyemouth, Berwickshire.

DAI, used demonstration only, plus joystick, adventure cassette and handbook, bargain £590. Everyman Computers, Edward Street, Westbury, Wiltshire. Tel: 0373-864644.

BBC BUGBYTE SPACE WARP. Original boxed cassette and instructions, only £7. Tel: 0592-757580 after 7 pm.

SPECTRUM PROGRAMMING. Learn Basic programming the easy way with our fully structured cassette course. Let the computer teach you! 250K of programs ending with a computerised exam, only £9.95, Barclaycard accepted. Sussex Software, Wallsend House, Pevensey Bay, Sussex.

Computer Swap

INTELIVISION VIDEOGAME, and cartridges, £195 ono. D. Hall, Chelmsford (0245) 50092.

ACORN BUILT ATOM, FP run, via, 12K + 12K, 5V3A external regulated power supply, leads, manual, books, cassette deck, 6 months old, £200. Emigrating. Tel: 01-459 6133 evenings/w'ends.

AVT D210G. 12 inch high resolution green screen monitor, metal case, anti glare filter, 6 months old. Emigrating. £80 ono. Tel: 01-459 6133 evenings/w'ends.

SHARP MZ80K — 48K model, £299 ono. Stuart Payton, Prince of Wales Inn, Lingfield Road, East Grinstead.

BBC SOFTWARE
Educational and Leisure programs
Space Academy 32K, Driving Test 32K, Goldmine 32K, England 32K, Battle Ships 32K, Film Buffs 32K, and more. Programs £4 inc. 2 for £6 inc S.A.E. for details.
Sent by return of post after cheques/POs cleared. Mail order only.
SWIFT LINK SOFTWARE
118-120 WARDOUR STREET, W1V 4BT

BBC MICRO Pools Predictor, Model A or B. Easy data entry. Uses powerful mathematical and statistical forecasting model. User tunable facility. On cassette with full instructions, £4.99. Mayday Software, 181 Portland Crescent, Stanmore, HA7 1LR.

VIC 101 8K cased power light, new monitor, basic four cassette handler, 300/600 board, inverse normal screen 2mHZ, green screened TV, over 100 programs, want £250. Tel: Orpington 72793.

"VIDEO GENIE", 16K EG 3003, £160. Tel: Gourock 39817 (evenings), Mr. Gray.

ATARI 400 16K, including Recorder, Manuals, Joysticks, full colour graphics with Star Raiders cassette, Golf, etc, etc, £260 ono. Randon, 118 Rusper Road, Horsham, Sussex. Tel: 0403 62639.

ZX81 16K plus software, £60 ono. Tel: Birmingham 561 1064.

TRS-80, MODEL 1, level 2, 16K, boxed, in perfect condition, 19 months old, £150 ono. Bristol (0272) 611765 (after 5 pm, weekends).

ZX81 PLUS 16K RAMPACK, sound board, full-size moving keyboard, I-O port with 8 LEDF, with 8 relay, also many arcade games, £85 wanted. Tel: 01-940 8557.

ATARI VIDEO COMPUTER with Combat and Space Invaders, Air Sea Battle, joysticks and paddle controls, only £60. Tel: 0235 29017.

ZX81 SINCLAIR Belt 16K, practically new printer, over £60 software, cost £225, accept £130 ono. Tel: 041-639 7283.

ZX81 16K Cassette Recorder, four software cassettes, 14in B/W television, all in perfect working order, £99 ono. Stephen Duncan, Tel: Greenock (0475) 25738.

BBC MICRO, MODEL B, 32K, one month old, price £355. Robert McMaster, Cumbernauld (02367) 33142 (after 6 pm).

ZX81 16K, with Protos keyboard plus leads, software etc. Would cost over £140, only £50 ono. Telephone Byfleet 44489 (evenings).

ATARI 400 plus cassette player, Star Raiders, Cross Fire etc., swap for BBC Modern A or B plus cash. Tel: 571-1309 after 7 pm (Kakey).

SPECTRUM WANTED, 16 or 48K. Top price paid. Contact Steven Godwin on 01-452 9436.

VIC20, plus cassette unit, programmes aid plus tapes, £180. Contact Steve on Slough 72664.

For details of classified advertising rates see coupon on Page 4.

Peek & poke

Peek your problems to our address. Ian Beardsmore will poke back an answer.

PACK UP YOUR TROUBLES

Phillip Watson, Burnside, East Boldon, Tyne & Wear, writes:

Q Like many ZX81 owners I have had a lot of trouble with *Load* and *Save*. I plan to buy a new computer in the near future, and the obvious choice is the Spectrum. However, I am worried about the *Load/Save* commands on it. I might therefore opt for a Vic20 or the new Vic30.

Has the Spectrum better *Loading* and *Saving* facilities than the ZX81? If not, then I think the Vic will suit me. All the Commodore machines that I have used have been tremendously easy when it comes to *Loading* and *Saving*. Do Commodore tape decks take digital recordings? If so, is this the reason for their success?

A The Spectrum has a built-in schmitt trigger which cuts out a great deal of the extraneous noise that renders so many ZX81 tapes useless. As yet I have come across no *Loading* or *Saving* problems with the Spectrum.

Commodore tapes are recorded digitally, which helps to minimise *Loading* and *Saving* problems.

A DISABLING PROBLEM

Andrew Dunne of Scott Avenue, Baxenden, Lancashire writes:

Q In the Spectrum section of *Popular Computing Weekly*, August 5, Sam Goodwin stated that the *Break* key of the Spectrum could be disabled. I would like to know if this is possible in the ZX81, with any or all the keys. Also I would like to know if it is possible to merge two or more programs on the ZX81?

A The normal keyboard scan has to be replaced by one written in machine code. This scan will look for a key entry and, on a specific key being pressed, will take action, accordingly. Ensure that, in the machine code program, the *Break* function is ignored. The same principle will work for any key.

Only a certain amount of chaining and merging of programs and data is possible on the ZX81. Barry Cornhill wrote an article dealing with this which appeared in our May 13 and June 3 issues.

AUX ARMES, CITOYENS

Paul Bateson of Guildford, Surrey, writes:

Q I have a ZX81 and I would like to know if my father could use it in his company. He has about 50 people working for him, many of them doing shifts. I would like a program that makes it easy to keep track of which person is working what hours.

This program should also keep a record of who has what days off, and who would like to swap shifts. Since the time of a shift affects the workers' pay, this program should ideally be tied in with the work roster.

Each worker has his own code number. But, because there are pay details on the computer as well, would it be possible for some sort of security system to be included?

A I have had several questions of this type. Usually they are so specific as to be of only slight interest to other readers. For this reason I will try and answer the question in general terms.

The first thing to look at is the memory requirements of such a system. You will probably need more than 16K if you are to store all the information on a single tape, so I suggest you look at a 48K or 64K add on.

When considering business software on the ZX81, the first company that comes to mind, is Hilderbay. While they are by no means the only company producing this sort of software for the ZX81, they do concentrate on it. They can be contacted at Hilderbay Ltd, 8-10 Parkway, Regents Park, London NW1 7AA. In their range they have banking, wages, stock control, and budgeting programs available.

Both Saxon Computing, 3 St Catherines Drive, Beverley, Humberside and Bug Byte, 98/100 The Albany, Old Hall Street, Liverpool L39EP offer a database/file-handling type program. The Bug Byte one includes a security system.

If you want to just store information on shifts then you might well find that the Sinclair (Psion) *Vu-File* or the Video Software *Video-View* is what you need. Both cost £7.95 and can store up to 12 pages of information, using a 16K Ram pack. Video Software are at Stone Lane, Knivver, Stourbridge, West Midlands DY7 6EQ.

With regard to security, the obvious precautions are to keep the duty roster and payroll separate and to keep the computer locked-up. Alternatively, use an instruction like *Input* A$ where A$ is a code, followed by *if* A$= (the code) *Then Goto* (the rest of the program). Protection of data is a major problem for computer storage at every level and a security system cannot be properly devised until after the software has been developed.

A CRASHING BORE

Matthew Field of Park Road, Kingston upon Thames, writes:

Q I own a ZX81. In May I sent my computer back to Sinclair because it kept crashing. Now, almost every time I switch on my ZX81, I get a white band about two inches wide that moves up and down the screen. My television also seems to lose the horizontal hold. I do not want to send my ZX81 back to Sinclair, because I would then be 'computerless' once more.

A I can understand your reluctance about returning your ZX81 again.

It is common for the television to need slight re-tuning before you use your computer, even if the channel selector is exactly where it was when you used it previously. So, the first thing to try is slightly re-tuning your television. Next try your computer on a different television — it could be that it is the television that is faulty.

The white line sounds as though the problem may be overheating. Does your computer get very hot? This alone is unlikely to be the cause if you get the problem right from the power-up. If you are still having problems after checking the tuning and televisioon then you will have to face up to the prospect of sending your computer back.

REGISTERING AT COMPANIES HOUSE

R Bayliss of Links Drive, Solihull, West Midlands writes:

Q I have been thinking about setting up a company to produce my own software. I have heard that you can send off and register a company for under £2. If so, could you please give me the address that I must write to. If this is not correct, could you give me any information about starting a company.

A You are thinking of the old-style '£1 company' set up with the minimum holding of two £1 shares. The new PLC rules covering limited and unlimited companies make it even easier to set up an unlimited company.

All you need is a certificate which gives your name, your trading name and your line of business. This must be displayed at your place of operation. In effect, you only need to type up the details and hang them on the wall. You need to notify your bank when you open your company account, and they will list you as R Bayliss T/A (Trading as) then your company name. You can no longer register the name of an unlimited company.

A limited company will cost about £100 to set up. A limited company is registered at Companies House, which entails various fees.

The first thing to do is write to Companies House, which now has its main base in Swansea and ask for a company registration form. The minimum requirements are that each share should be at least a pound, and that there should be at least £1000 worth of shares available. Of these at least one must be held by each of two nominated company executives, though of course you can have more executives, more shares, and higher value shares.


You can either go through the various stages using a Companies sealing agent, who will organise the registration or you can buy a ready made company. This latter choice would be quicker and cheaper.

NB In an unlimited company you are liable for all your company's debts.

ANCIENT ALGORITHMS

PUZZLE NO26

by Tony Roberts

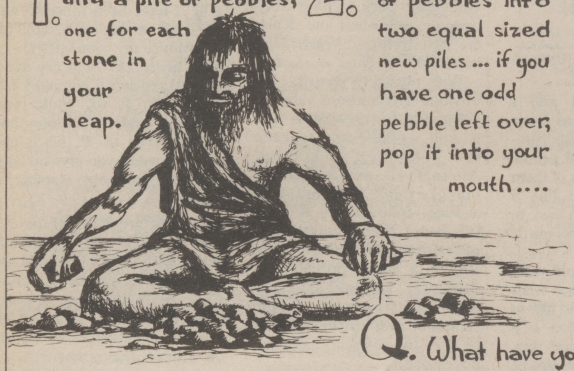


1. TAKE a heap of stones and a pile of pebbles, one for each stone in your heap.

2. SPLIT your pile of pebbles into two equal sized new piles ... if you have one odd pebble left over, pop it into your mouth....

3. Throw away one of your piles of pebbles.

4. Now, for each pebble in the pile, add as many new stones to the heap as were in it originally.

5. If you have no pebble in your mouth, take from the heap as many stones as you have pebbles.



Q. What have you been calculating?

Solution to Puzzle No 22

This is Newton's $\sqrt[2]{\ }$ algorithm. It calculates the square root of the number of stones (accurate only to the nearest whole stone of course) in the original heap.

An equivalent Basic program would be:

```
10 INPUT H : H = H - 1 : L = 1
20 P = INT(H/L)
30 L = L + P
40 L = INT(0.5 + L/2)
50 IF L = C THEN PRINT L : STOP ELSE C = L :
   GOTO 20
```

Winner of Puzzle No 22

The winner is: Ray Reeves, Longford Avenue, Southall, Middlesex, who receives £10. He adds: the usual expression is *Let* $S(I + 1) = (S(I) + N/S(I))/2$, where N is the number whose square root is required. $S(I)$ is initially 1 and is replaced by the value $S(I + 1)$ for the next iteration. The method was useful on the early hand-held calculators before they were fitted with a square-root key. The method will produce as accurate an answer as you wish, depending on how far you go. A good guess for $S(I)$ as an initial value will shorten the working considerably.

Rules

The winner of the puzzle will be the reader who, in the opinion of *Popular Computing Weekly*, has submitted the best solution. Preference will be given to solutions which show how the entrant arrived at the correct answer. Envelopes containing entries should be clearly marked 'PUZZLE'. The closing date is Tuesday October 19. The judge's decision is final.

ARTHUR'S REPLY

A.R.T.H.U.R.

Laurence Lerner & James Macdonald
PUBLISHED BY THE HARVESTER PRESS, 16, SHIP ST, BRIGHTON. TEL: 0273 727031. £2.95.

HE OFFERS TO TAKE OVER EVOLUTION

THEY CALL IT NATURE ; IT'S JUST NUMBERS REALLY.
YOU NEED A MILLION CHANCES
YOU NEED A MILLION CHANCES
I KNOW THE ODDS : I'M NOT AFRAID OF NUMBERS.
THEY TURN ME ON. YOU NEED A MILLION CHANCES
YOU NEED A MILLION CHANCES
YOU NEED A MILLION CHANGES
IF THEY WOULD LET ME TRY, I'D CRUNCH THOSE NUMBERS
IN MICROSECONDS. I KNOW FOR ONE IMPROVEMENT
YOU NEED A MILLION MUTATIONS
MUTATIONS
MUTATIONS
PUTATIONS
YOU NEED PUTATIVE CHANGES FOR IMPROVEMENT
LET ME PUTATE : I'LL DO AS WELL AS NATURE.

SUPPOSE YOU HAVEN'T GOT A MILLION YEARS
YOU CAN USE ME. YOU PROGRAMME WHAT I DO.
WE CAN HAVE ALL HAIR RED OR ALL EYES BLUE,
WE CAN HAVE EXTRA LIMBS, TWO HEADS, FIVE EARS,
WE CAN HAVE THREE FOOT WOMEN, TEN FOOT MEN,
NINE YEARS GESTATION ; CAN ABOLISH BIRTH
SICKNESS OR DEATH ; — WELL, SICKNESS IF NOT DEATH.
WE CAN TRY ANYTHING : JUST TURN ME ON,
FEED ME THE FACTS, AND WAIT FOR TRIAL AND TERROR.



16K ● ZX SPECTRUM SOFTWARE ● 48K

★ SPECIAL OFFER FOR THIS ISSUE ONLY ★

ZX BERSERK **£5.50**
The robots are armed to kill. Can you destroy them? Escape is impossible, but how long can you survive?

JEGA TAPE 1 **£5.50**

Bridger
Watch out motorist! Collapsing bridges ahead.

Depth Charge
A war at sea. Your mission is to destroy enemy U-Boats.

JEGA TAPE 2 **£5.50**

Alien Blaster
Features 3D Firing effect — your space ship must blast through alien attacks and prepare for docking.

Spagoids.
Beware! Monsters are after the Humanoids for food. Lure them into the pit holes before they catch you.

SPECMAN **£5.95**
Keep on gobbling, don't stop dashing. Get the power dot and chase the ghost back. Full arcade action.

Buy two cassettes — get one free.

True arcade display. Fast delivery. Mail order only.

Cheques and postal orders payable to:

JEGA SOFTWARE
27 Hallcroft Avenue
Countesthorpe
Leicestershire
LE8 35L

(S.A.E. for ZX Catalogue.)

ZX SPECTRUM SOFTWARE

SUPERDRAW 16 **£5.00**

List of Features
- 16K Spectrum graphics pack
- Full screen high resolution colour
- Moving cursor control
- Large alphabet facility
- Pictures saved on cassette
- Automatic "slide show" option
- Menu driven, easy to operate, crash proofed
- Documented to usual high Video Software standard
- Demonstration slide show
- Audio commentary on reverse of cassette

SUPERVIEW 48 **£5.00**

List of Features
- 48K Spectrum personal viewdata
- Page creation with moving cursor
- Large alphabet option
- 48 full screen two colour pages *OR*
- 24 full screen full colour pages
- Random page recall
- Continuous page rotate
- Print option
- Full operating manual to our usual standard
- Audio commentary on reverse of cassette

VIDEO SOFTWARE LTD

Stone Lane Kinver, Stourbridge,
West Midlands, DY7 6EQ

Prices include VAT, P&P Immediate delivery.

Full range of ZX81 software still available.

POPULAR Computing WEEKLY

HOBHOUSE COURT, 19 WHITCOMB STREET WC2

WHY NOT TAKE OUT A SUBSCRIPTION?

You can have *Popular Computing Weekly* sent to your home for £19.95 a year. This will cover the cost of the magazine, postage and packing.

Fill in the coupon below and keep yourself up to date week by week.

I would like to take out ..... subscription(s) to *Popular Computing Weekly.*

Name.....

Address .....

.....

.....

Tel No. .....

I enclose £..... for ..... subscription(s).

Please make cheques payable to Sunshine Publications Ltd.



'Whether your interests lie in business, educational, scientific, control or games applications, this system provides a possibility for expansion which is unparalleled in any other machine available at present,' comments Paul Beverley in the July 1982 edition of *Personal Computer World*.

The BBC Microcomputer can genuinely claim to satisfy the needs of novice and expert alike. It is a fast, powerful system generating high resolution colour graphics and which can synthesise music and speech. The keyboard uses a conventional layout and electric typewriter 'feel.'

You can connect directly* to cassette recorder, domestic television, video monitor. disc drives, printers (dot matrix and daisy wheel) and paddles. Interfaces include RS423, inter-operable with RS232C equipment, and Centronics. There is an 8-bit user port and 1MHz buffered extension bus for a direct link to Prestel and Teletext adaptors and many other expansion units. The Econet system allows numerous machines to share the use of expensive disc drives and printers.

BASIC is used, but plug-in ROM options will allow instant access to other high level languages (including Pascal, FORTH and LISP) and to word processing software.

A feature of the BBC Microcomputer which has attracted widespread interest is the Tube, a design registered by Acorn Computers. The Tube is unique to the BBC Microcomputer and greatly enhances the expandability of the system by providing, via a high speed data channel for the addition of a second processor. A 3MHz 6502 with 64K of RAM will double processing speed; a Z80 extension will make it fully CP/M** compatible.

The BBC Microcomputer is also at the heart of a massive computer education programme. The government has recommended it for use in both primary and secondary schools. The BBC Computer Literacy Project includes two series of television programmes on the use and applications of computers.

There are two versions of the computer. Model A, at £299, offers 16K of RAM and Model B at £399 has 32K of RAM.

For technical specification and order form, send stamped addressed envelope to P.O. Box 7, London W3 6XJ and for details of your nearest stockist ring 01-200 0200.

Broader horizons

The BBC Microcomputer System

*Model A has a limited range of interfaces but can be upgraded to meet Model B specification.
**CP/M is a registered trade mark of Digital Research.

The BBC Microcomputer is designed, produced and distributed in the UK by Acorn Computers Limited.